


VOR/DME CRI 112.3 Chan 70	APP CRS 041°	Rwy Idg 13R 12467 TDZE 13L 9093 Apt Elev 13
--	------------------------	--

VOR or GPS RWY 13L/R

JOHN F KENNEDY INTL (JFK)

For inop lead-in lights, procedure NA.	Rwy13L ALSF-2 	MISSED APPROACH: At or beyond MAP, climbing right turn to 4000 on heading 100° and V-1 to DPK VOR/DME and hold.		
		D-ATIS (ARR/DEP)(ARR-NE) (ARR-SW) 128.725 117.7 115.4	NEW YORK APP CON 128.125 269.0	KENNEDY TOWER Rwys 4R/22L and 13L/31R 119.1 281.55 Rwys 4L/22R and 13R/31L 123.9 281.55

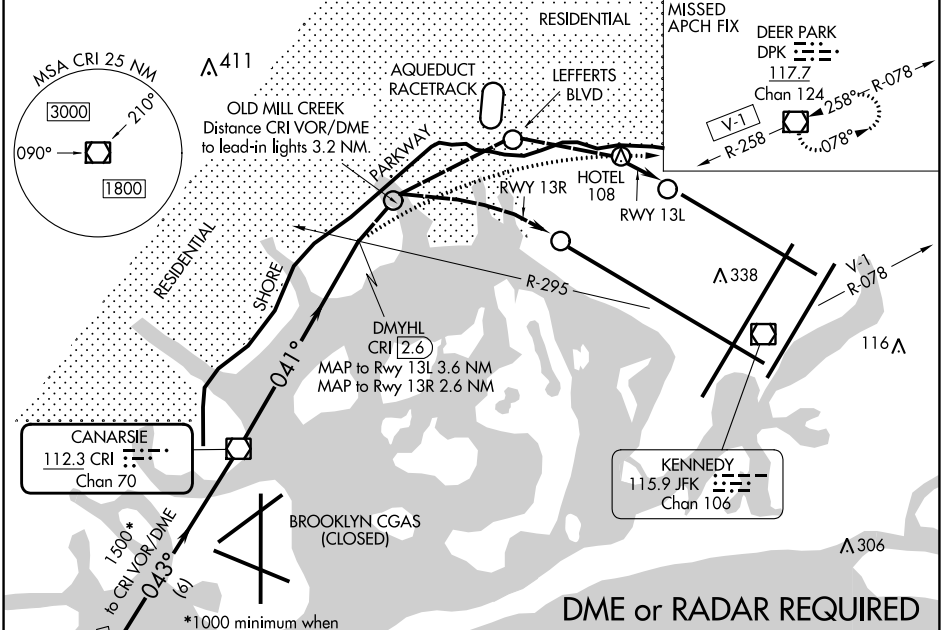


DME or RADAR REQUIRED

○ Lead-in light groups


When visual reference established, fly visual to airport via lead-in lights to Rwy 13L or 13R. Close adherence to flight track required for noise abatement.

† 2000 minimum when authorized by ATC.

* 1000 minimum when authorized by ATC.

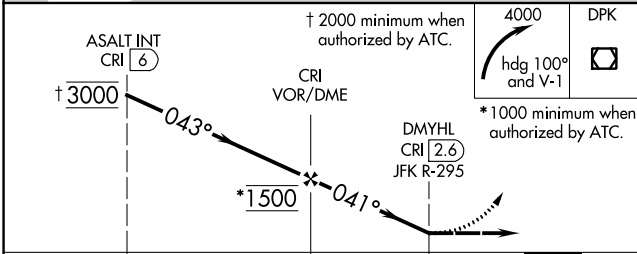

ELEV 13	D TDZE 13
---------	------------------

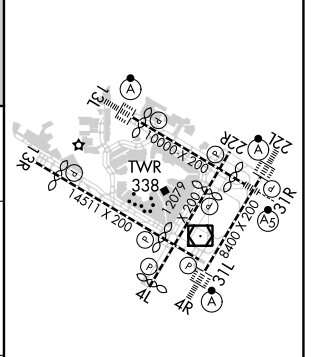

CATEGORY	A	B	C	D
RLLS-13L	800-2 787 (800-2)	800-2½ 787 (800-2¼)	800-2½ 787 (800-2¼)	800-2½ 787 (800-2¼)
RLLS-13R	800-2 787 (800-2)	800-2½ 787 (800-2¼)	800-2½ 787 (800-2¼)	800-2½ 787 (800-2¼)
RLS Rwys 13L and 13R HIRL all Rwys TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R FAF to MAP 2.6 NM				
Knots 60 90 120 150 180				
Min:Sec 2:36 1:44 1:18 1:02 0:52				

NE-2, 31 OCT 2024 to 28 NOV 2024

NE-2, 31 OCT 2024 to 28 NOV 2024