

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 31 OCT 2024 to 28 NOV 2024

TOP ALTITUDE: ASSIGNED BY ATC

- D-ATIS 119.95
- CLNC DEL 121.85 (when tower closed)
- GND CON 121.85
- COUNTY TOWER * 118.5 (CTAF)
- CLEVELAND DEP CON 125.35 346.325

TAKEOFF MINIMUMS:


Rwys 6, 24: Standard with a minimum climb of 500' per NM to 1400.

NOTE: RADAR required.


NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: PUUJL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

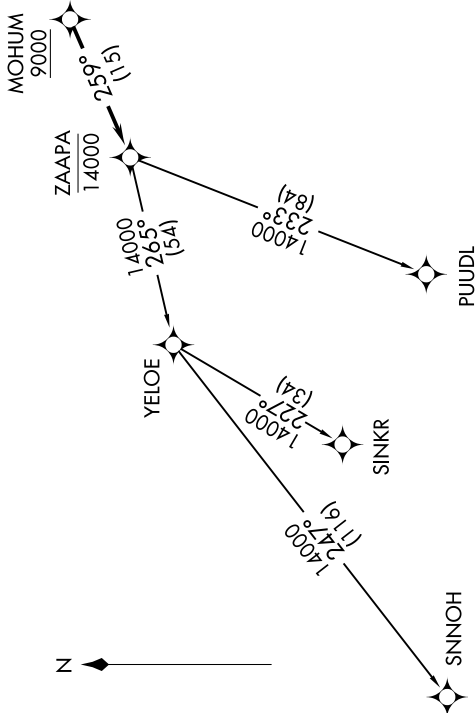

NOTE: Chart not to scale.

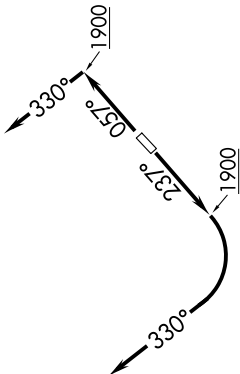

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb on heading 057° to 1900, then on heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

TAKEOFF RUNWAY 24: Climb on heading 237° to 1900, then right turn heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUJL TRANSITION (ZAAPA5.PUUJL)

SINKR TRANSITION (ZAAPA5.SINKR)

SNNOH TRANSITION (ZAAPA5.SNNOH)

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 31 OCT 2024 to 28 NOV 2024