

WAAS CH <b>97509</b> <b>W01B</b>	APP CRS <b>011°</b>	Rwy Idg <b>11500</b> TDZE <b>286</b> Apt Elev <b>312</b>
--	------------------------	--

# RNAV (GPS) Y RWY 1C

WASHINGTON DULLES INTL (IAD)



RNP APCH - GPS.

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.  
**⚠** Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. For inop ALU, increase LNAV/VNAV all Cats visibility to 1½ SM. Increase LNAV Cat C/D visibility to 1¼ SM.



**MISSED APPROACH:**  
Climb to 4000 direct CHDMN and hold, continue climb-in-hold to 4000.

D-ATIS <b>134.85</b>	POTOMAC APP CON <b>120.45 306.925</b> (241°-330°) <b>128.525 306.925</b> (091°-240°) <b>126.1 338.25</b> (331°-090°)	DULLES TOWER <b>120.1 317.8</b> (Rwy 1R/19L) <b>120.25 348.6</b> (Rwy 1C/19C) <b>134.425 348.6</b> (Rwys 1L/19R and 12/30)	GND CON <b>121.9 317.8</b> (EAST) <b>121.625 348.6</b> (WEST)
-------------------------	---	---	---

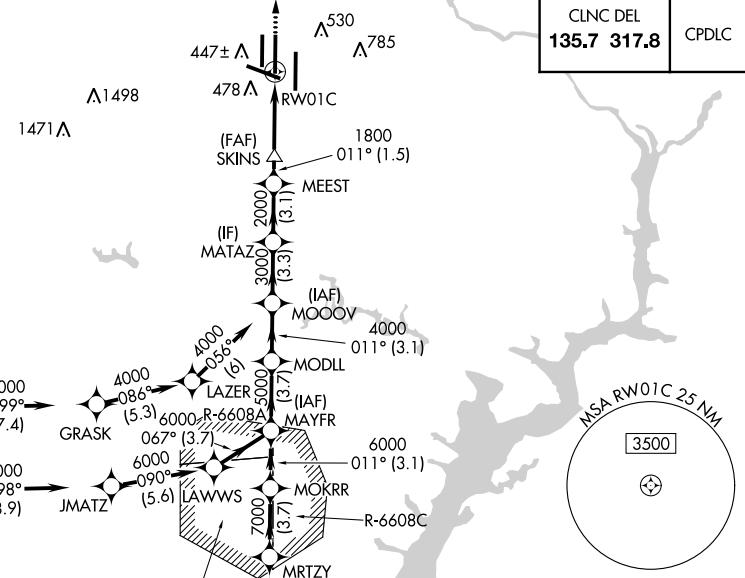



CLNC DEL <b>135.7 317.8</b>	CPDLC
--------------------------------	-------

NE-3, 31 OCT 2024 to 28 NOV 2024

NE-3, 31 OCT 2024 to 28 NOV 2024

ELEV <b>312</b>	<b>D</b>	TDZE <b>286</b>
-----------------	----------	-----------------

TDZ/CL Rwys 1C, 1L, 1R, 12, 19C, and 19R  
 REIL Rwy 30  
 HIRL all Rwys

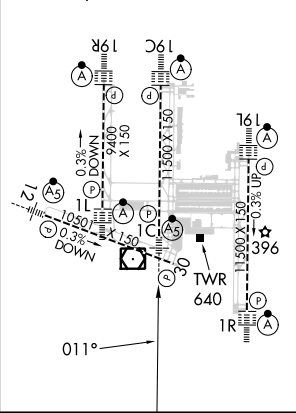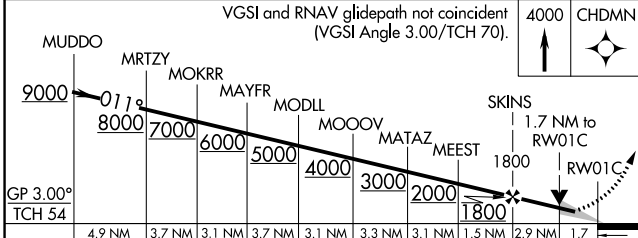

GP 3.00° TCH 54	4.9 NM	3.7 NM	3.1 NM	3.7 NM	3.1 NM	3.3 NM	3.1 NM	1.5 NM	2.9 NM	1.7 NM	
CATEGORY	A		B		C		D				
LPV DA	486/18		200 (200-½)								
LNAV/VNAV DA	801/55		515 (500-1¼)								
LNAV MDA	900/24		614 (600-½)		900-1¾		614 (600-1¾)				
CIRCLING	940-1		628 (700-1)		940-1¾		628 (700-1¾)		1180-2¾		868 (900-2¾)