

| | | | |
|---|------------------------|-----------------------------|---------------------------------------|
| LOC/DME I-FYJ 109.55 Chan 32 (Y) | APP CRS 094° | Rwy Idg TDZE Apt Elev | 5000 14 20 |
|---|------------------------|-----------------------------|---------------------------------------|


LOC RWY 10

MIDDLE PENINSULA RGNL (F'YJ)

NA When local altimeter setting not received, use Newport News altimeter setting and increase all MDA 80 feet and increase S-10 Cat B and Circling Cat B visibility 1/4 SM. VDP NA when using Newport News altimeter setting.

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct HCM VORTAC and hold, continue climb-in-hold to 2000.


| | | |
|--------------------------|---|---------------------------------|
| AWOS-3 132.825 | POTOMAC APP CON 126.4 282.375 | UNICOM 123.0 (CTAF) 0 |
|--------------------------|---|---------------------------------|

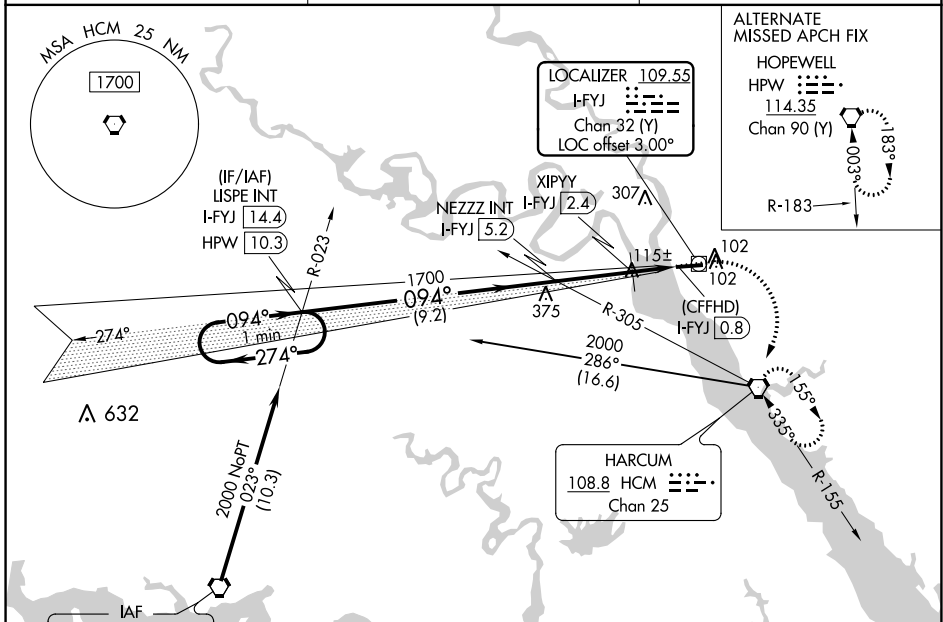

NE-3, 31 OCT 2024 to 28 NOV 2024

NE-3, 31 OCT 2024 to 28 NOV 2024

| | |
|---------|---------|
| ELEV 20 | TDZE 14 |
|---------|---------|

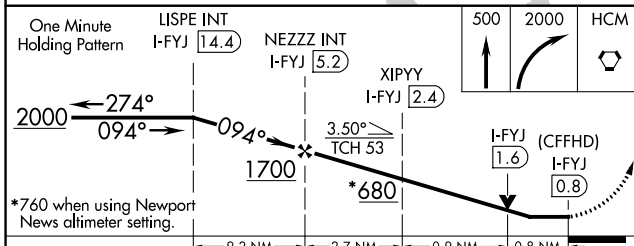

| CATEGORY | A | B | C | D |
|--------------------|----------------------|----------------------|---|----|
| S-10 | 680-1 | 666 (700-1) | | NA |
| CIRCLING | 680-1 | 660 (700-1) | | NA |
| XIPYY FIX MINIMUMS | | | | |
| S-10 | 380-1 | 366 (400-1) | | NA |
| CIRCLING | 480-1 460 (500-1) | 620-1 600 (600-1) | | NA |

| | | | | | |
|--------------------|------|------|------|------|------|
| MIRL Rwy 10-28 | | | | | |
| REIL Rws 10 and 28 | | | | | |
| FAF to MAP 4.4 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 4:24 | 2:56 | 2:12 | 1:46 | 1:28 |