RNAV (GPS) RWY 12R

ST LOUIS DOWNTOWN (CPS)

APP CRS	Rwy Idg	7002
107°	TDZE	413
	Apt Elev	413

RNP APCH - GPS.

When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase LNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.

ATIS	ST LOUIS APP CON	DOWNTOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL (When twr closed)	UNICOM
121.45	123.7 371.875	119.925 (CTAF) L 379.3	121.8	118.275	121.8	122.95

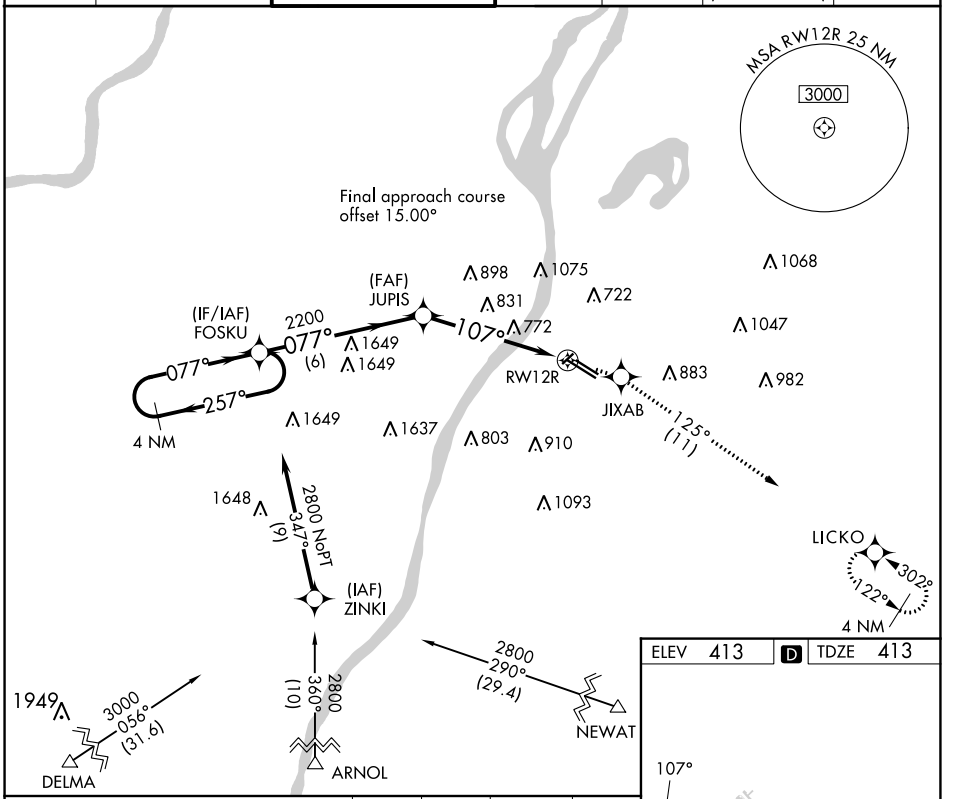

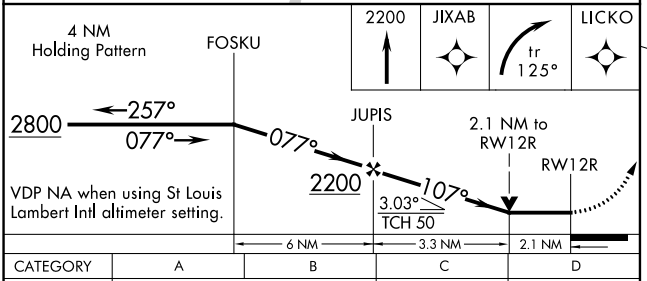

2200	JIXAB	tr 125°	LICKO

CATEGORY	A	B	C	D
LNAV MDA	1140-1	727 (800-1)	1140-2 727 (800-2)	1140-2¼ 727 (800-2¼)
CIRCLING	1140-1	727 (800-1)	1240-2½ 827 (900-2½)	1380-3 967 (1000-3)

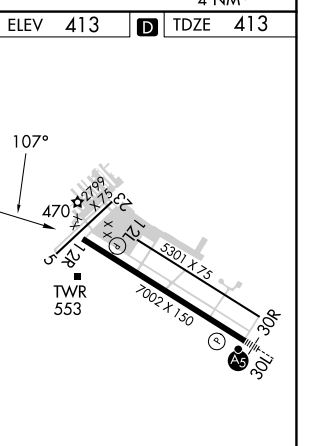

HIRL Rwy 12R-30L
REIL Rwys 12L and 12R
REIL Rwy 30R L
MIRL Rwys 5-23 and 12L-30R

EC-3, 31 OCT 2024 to 28 NOV 2024
EC-3, 31 OCT 2024 to 28 NOV 2024