

| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 93513 W01A | APP CRS 010° | Rwy Idg TDZE Apt Elev | 6604 87 91 |
|--|------------------------|-----------------------------|---------------------------------------|


RNAV (GPS) RWY 1

H L SONNY CALLAHAN (CQF)


⚠ Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 329 feet, LNAV/VNAV DA to 517 feet, and all MDA 60 feet; increase LNAV Cats C/D visibility 1/8 SM and Circling Cats C/D 1/4 SM.

MISSED APPROACH:
Climb to 700 then climbing left turn to 2000 direct BFM VORTAC and hold.

| | | |
|----------------------------|--|---------------------------------|
| AWOS-3PT 118.425 | MOBILE APP CON ★ 118.5 269.3 | UNICOM 123.0 (CTAF) 0 |
|----------------------------|--|---------------------------------|

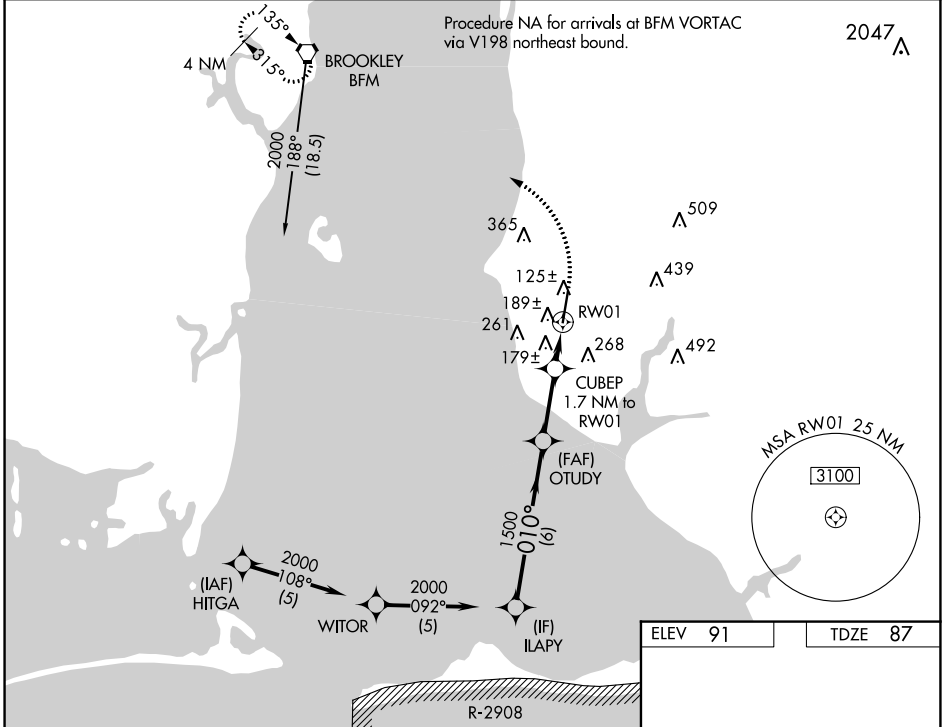

| | | | | | | |
|----------------------------------|----------------------|----------------------|----------------------------|----------------------|------|-------------|
| Procedure Turn NA 2000 | ILAPY | OTUDY | CUBEP | RW01 | RW01 | BFM |
| | | | | | | |
| GP 3.00° TCH 35 | 010° | 1500 | 1500 | 1500 | 1500 | *LNAV only. |
| CATEGORY | A | B | C | D | | |
| LPV DA | | 287-3/4 | 200 (200-3/4) | | | |
| LNAV/VNAV DA | | 475-13/8 | 388 (400-13/8) | | | |
| LNAV MDA | | 440-1 | 353 (400-1) | | | |
| CIRCLING | 560-1 469 (500-1) | 580-1 489 (500-1) | 720-13/4 629 (700-13/4) | 740-2 649 (700-2) | | |

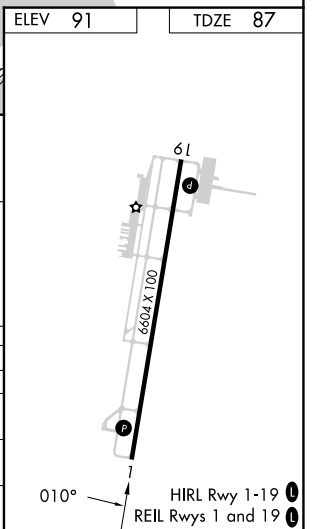

SE-4, 31 OCT 2024 to 28 NOV 2024

SE-4, 31 OCT 2024 to 28 NOV 2024