

WAAS CH <b>86311</b> <b>W28A</b>	APP CRS <b>282°</b>	Rwy Idg TDZE <b>911</b> Apt Elev <b>914</b>	<b>5499</b>
--	------------------------	---	-------------

# RNAV (GPS) RWY 28


GENESEE COUNTY (GVQ)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rochester altimeter setting: increase LPV DA to 1263 feet and visibility ¼ SM all Cats; increase LNAV/VNAV DA to 1466 feet and visibility ½ SM all Cats; increase all MDA 120 feet and visibility LNAV Cat C ¼ SM and Circling Cats C and D ½ SM. Baro-VNAV and VDP NA when using Rochester altimeter setting. For inop MALSRL increase LNAV Cat D visibility to 1½ mile. For inop MALSRL, when using Rochester altimeter setting increase LPV visibility all Cats to 1½ mile.





**MISSED APPROACH:** Climb to 3300 direct WAVRU and left turn via 162° track to YAVUD and left turn via 063° track to POCZI and hold.

AWOS-3PT <b>127.525</b>	ROCHESTER APP CON <b>123.7 322.3</b>	CLNC DEL <b>121.8</b>	UNICOM <b>122.7 (CTAF)</b> <b>1</b>
----------------------------	---	--------------------------	--

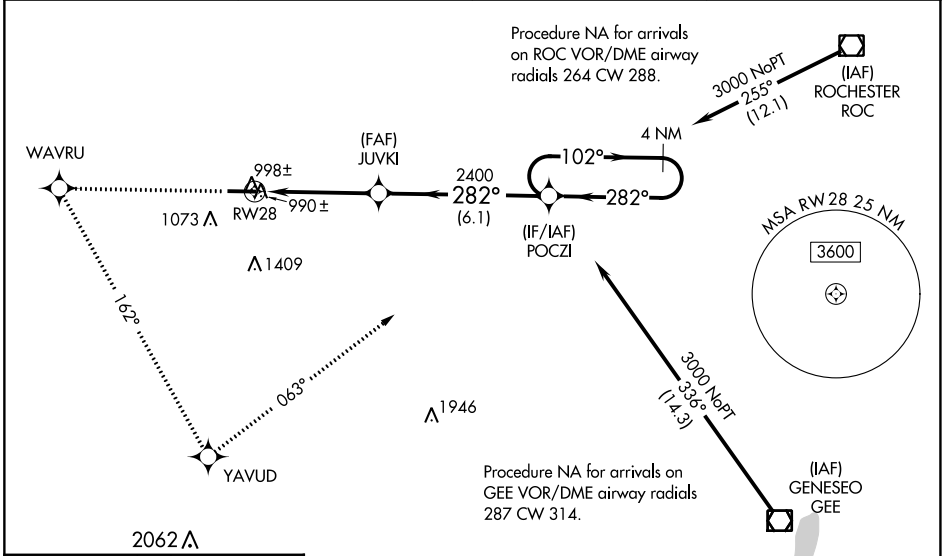

ELEV <b>914</b>	TDZE <b>911</b>
-----------------	-----------------

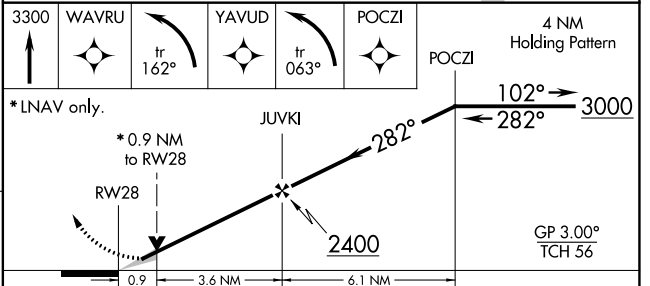

CATEGORY	A	B	C	D
LPV DA		1161-½	250 (300-½)	
LNAV/VNAV DA		1364-1	453 (500-1)	
LNAV MDA		1260-½	349 (400-½)	1260-1 349 (400-1)
CIRCLING	1380-1	466 (500-1)	1720-2¼ 806 (900-2¼)	1720-2½ 806 (900-2½)