




LOC I-DRI 111.1	APP CRS 355°	Rwy Idg TDZE Apt Elev	5494 197 202
---------------------------	------------------------	-----------------------------	---

LOC RWY 36
BEAUREGARD RGNL (DRI)

NA Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat C ½ SM and Circling Cats C/D visibility ¼ SM.

ODALS
MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT 118.225	POLK APP CON 123.7 261.3	UNICOM 122.8 (CTAF)
----------------------------	------------------------------------	-------------------------------

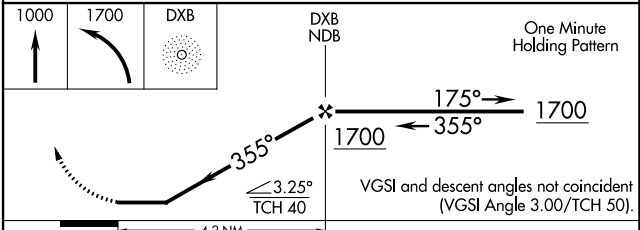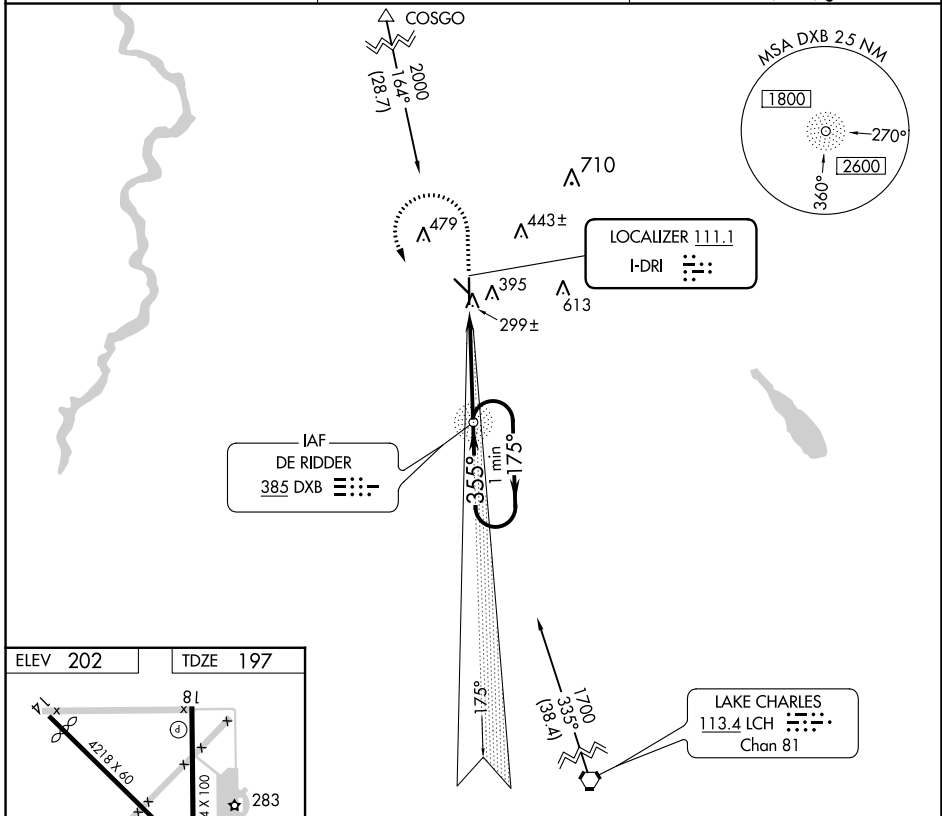

ELEV 202	TDZE 197				
FAF to MAP 4.2 NM		REIL Rwy 18	MIRL Rwy 18-36		
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24
CATEGORY	A	B	C	D	
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)	
CIRCLING	720-1 518 (600-1)		780-1½ 578 (600-1½)		1000-2½ 798 (800-2½)

SC-4, 28 NOV 2024 to 26 DEC 2024

SC-4, 28 NOV 2024 to 26 DEC 2024