

RNAV (RNP) Z RWY 26L




EL PASO INTL (ELP)

| | |
|------------------------|-------------------------|
| APP CRS 265° | Rwy Idg 9025 |
| | TDZE 3962 |
| | Apt Elev 3962 |


ASR For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALSRS, increase RNP 0.30 visibility all Cats to 1 mile. GPS Required.

MALSRS MISSED APPROACH: Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.

| | | | | |
|------------------------------|---|--|-------------------------------|--------------------------------|
| D-ATIS 120.0 254.3 | EL PASO APP CON 124.25 298.85 | EL PASO TOWER 118.3 239.275 | GND CON 121.9 348.6 | CLNC DEL 125.0 379.1 |
|------------------------------|---|--|-------------------------------|--------------------------------|

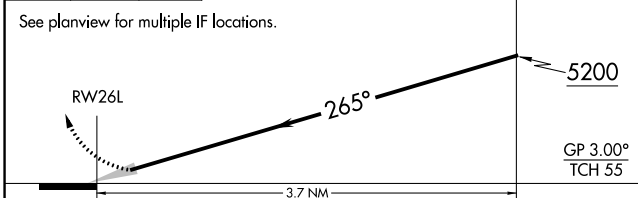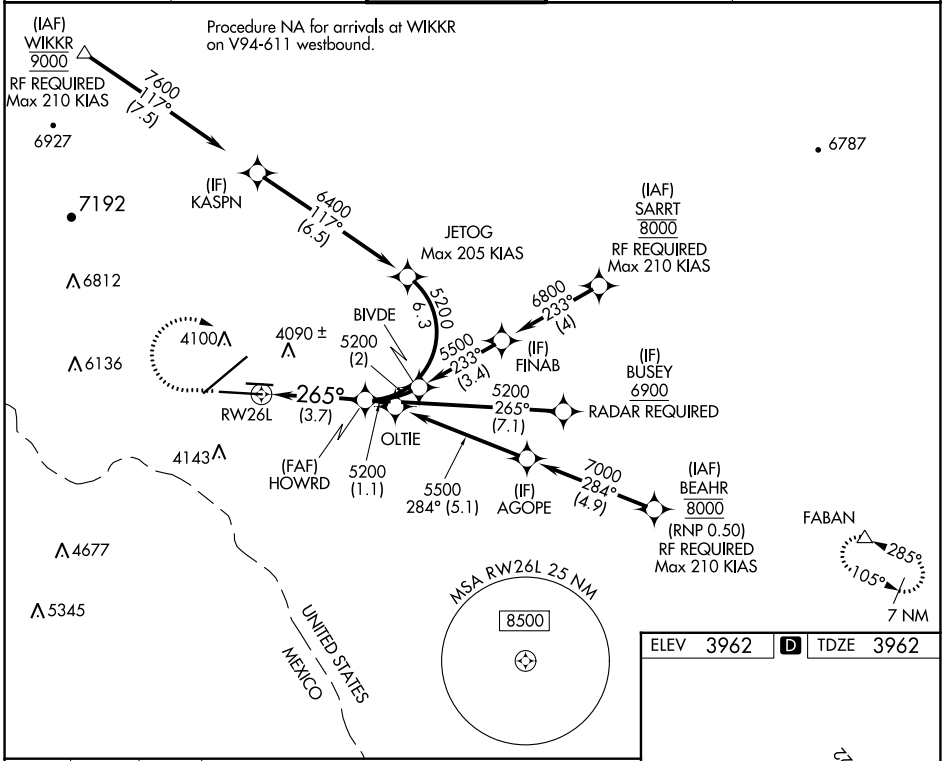

| | |
|-----------|--------------------|
| ELEV 3962 | D TDZE 3962 |
|-----------|--------------------|

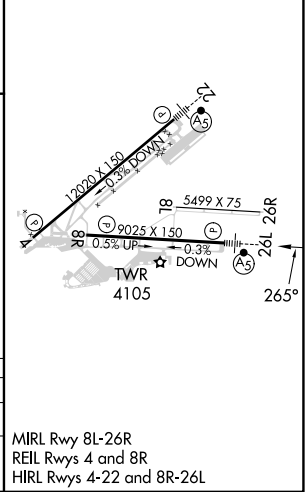

| CATEGORY | A | B | C | D |
|-------------|---|----------|---------------|---|
| RNP 0.30 DA | | 4275-1/2 | 313 (400-1/2) | |

AUTHORIZATION REQUIRED

MIRL Rwy 8L-26R
REIL Rwys 4 and 8R
HIRL Rwys 4-22 and 8R-26L

SC-3, 28 NOV 2024 to 26 DEC 2024

SC-3, 28 NOV 2024 to 26 DEC 2024