





LOC I-AAM 108.9	APP CRS 176°	Rwy Idg TDZE Apt Elev 9001 900 901
---------------------------	------------------------	--

ILS or LOC RWY 18

HECTOR INTL (FAR)

ADF or DME required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 2500 direct FAR VOR/DME and hold.
 For inop MALSR, increase S-ILS 18 Cat E visibility to RVR 4000, and S-LOC 18 Cat E visibility to RVR 5000. * Visibility Cat A/B/C/D RVR 1800 authorized with the use of FD or AP or HUD to DA.			

ATIS 124.5 379.2	FARGO APP CON 120.4 377.15	FARGO TOWER 133.8 290.4	GND CON 121.9 348.6	CLNC DEL 121.9 348.6
----------------------------	--------------------------------------	-----------------------------------	-------------------------------	--------------------------------

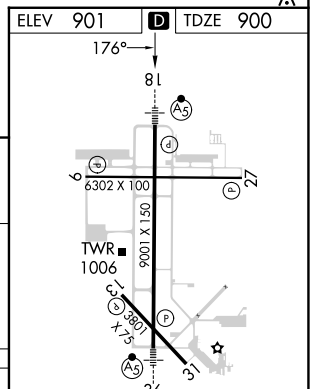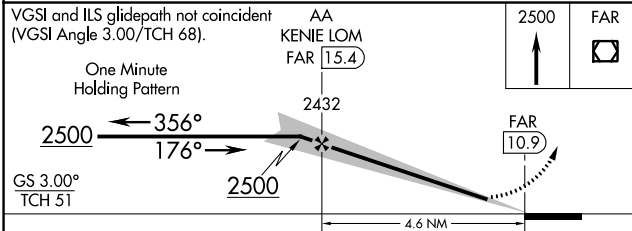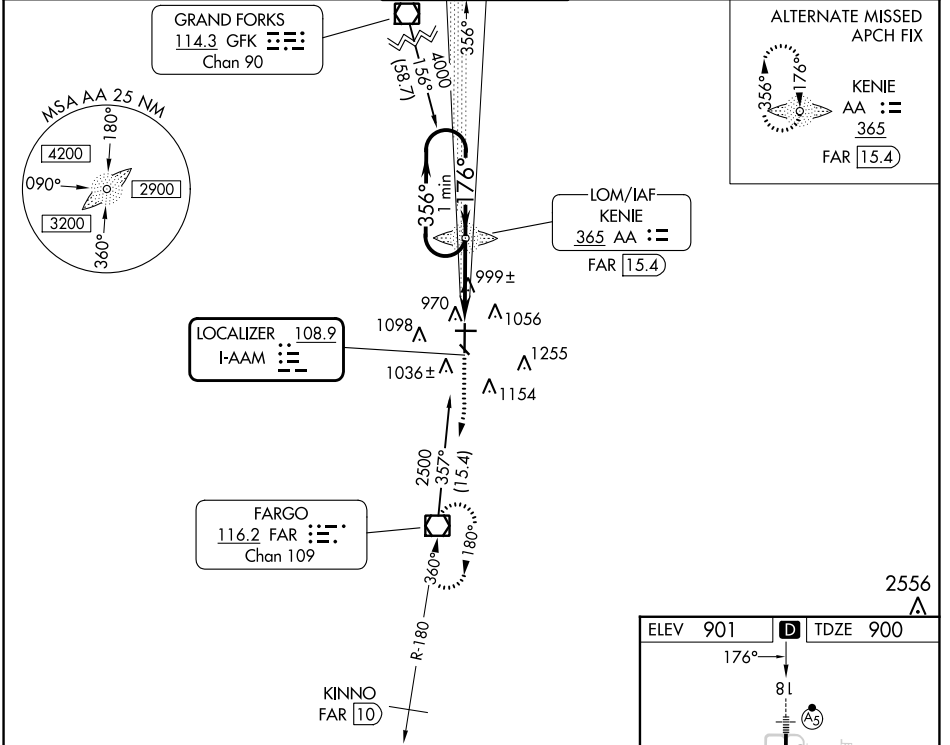

CATEGORY	A	B	C	D	E	
S-ILS 18*	1100/24 200 (200-½)					
S-LOC 18	1260/24	360 (400-½)		1260/40	360 (400-¾)	
CIRCLING	1380-1	479 (500-1)	1520-1¾ 619 (700-1¾)	1620-2¼ 719 (800-2¼)	1620-2½ 719 (800-2½)	
	Knots	60	90	120	150	180
	Min:Sec	4:36	3:04	2:18	1:50	1:32

HIRL Rwy 18-36
REIL Rwys 9 and 27
MIRL Rwys 9-27 and 13-31
FAF to MAP 4.6 NM

NC-1, 28 NOV 2024 to 26 DEC 2024

NC-1, 28 NOV 2024 to 26 DEC 2024