ILS or LOC RWY 8R

MIAMI INTL (MIA)

LOC/DME I-MFA	APP CRS	Rwy Idg	TDZE
110.3 Chan 40	092°	10506	8
		Apt Elev	9

DME or RADAR required.

For inop MALSR, increase S-ILS 8 all Cats visibility to 1½ mile. Simultaneous approach authorized with Rwy 9.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 on heading 270° and on DHP VORTAC R-335 to BRBRA/DHP 11.5 DME and hold.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15 DEP 133.675	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 348.6 127.5 (9/27/30)	135.35	

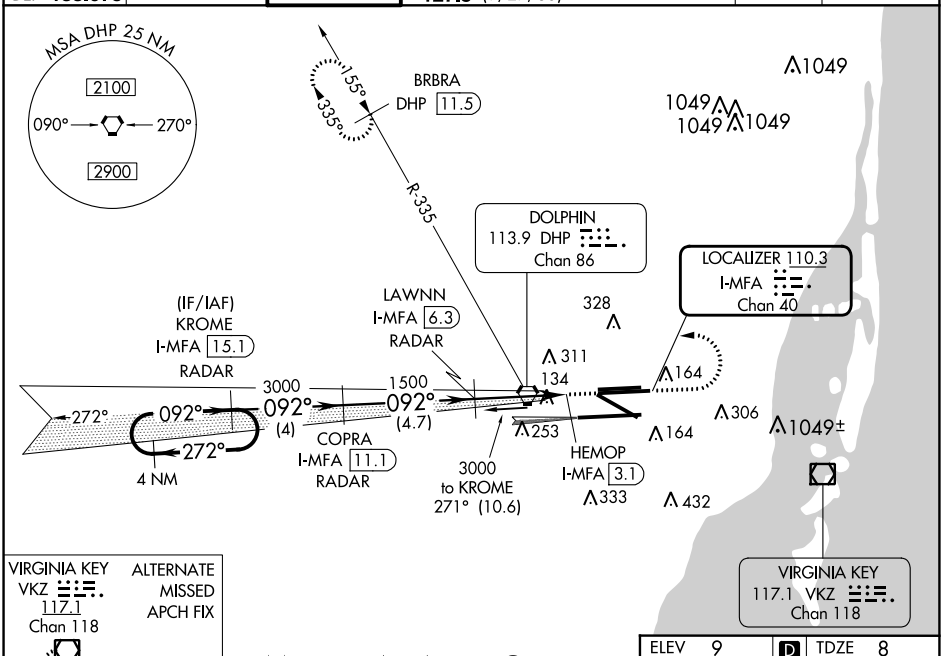



DME or RADAR REQUIRED



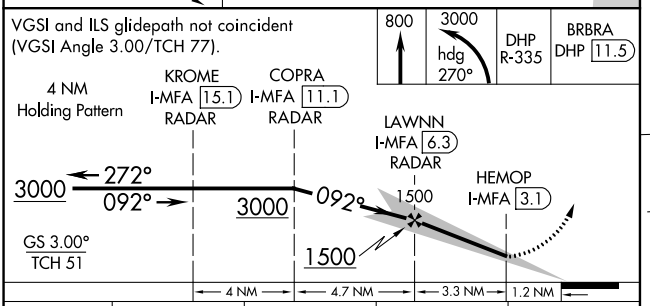

CATEGORY	A	B	C	D
S-ILS 8R	450/50 442 (500-1)			
S-LOC 8R	560/50 552 (600-1)			560/60 552 (600-1¼)

FAF to MAP 3.3 NM

Knots	60	90	120	150	180
Min:Sec	3:18	2:12	1:39	1:19	1:06

SE-3, 28 NOV 2024 to 26 DEC 2024
SE-3, 28 NOV 2024 to 26 DEC 2024