

MIAMI, FLORIDA

AL-257 (FAA)



24137

APP CRS	Rwy Idg	10220
272°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 26L

MIAMI INTL (MIA)

RNP AR APCH-GPS.		MALSF		MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.	
<p>Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.20 visibility to RVR 5500 for all Cats and increase RNP 0.30 visibility to RVR 6000 for all Cats.</p>					
D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R)	348.6	
DEP 133.675			127.5 (9/27/30)		

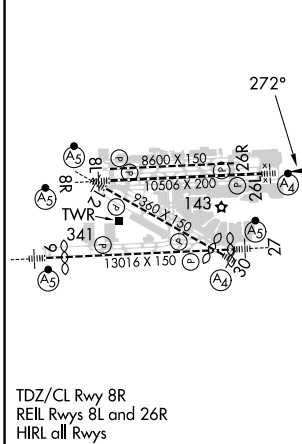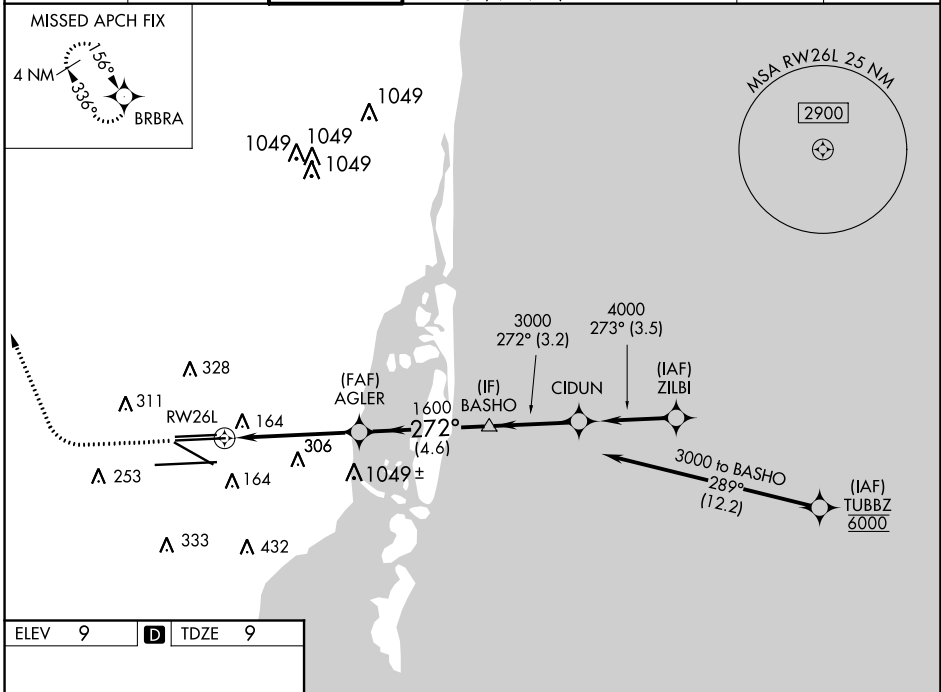

CATEGORY	A	B	C	D
RNP 0.20 DA		368/40	359 (400-¾)	
RNP 0.30 DA		418/50	409 (500-1)	

AUTHORIZATION REQUIRED

MIAMI, FLORIDA
Amdt 2 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)
RNAV (RNP) Z RWY 26L

SE-3, 28 NOV 2024 to 26 DEC 2024

SE-3, 28 NOV 2024 to 26 DEC 2024