

# FUNNL THREE DEPARTURE (RNAV)

**TOP ALTITUDE:  
Assigned by ATC**




D-ATIS  
125.85  
CINC DEL  
124.35  
GND CON  
121.9 348.6  
ROGERS TOWER  
119.35 269.45  
OKE CITY DEP CON  
124.2 336.4

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.

**TAKEOFF MINIMUMS:**

Rwys 13, 17L/R, 18, 31, 35L/R, 36:

Standard with minimum climb of 500' per NM to 1800.




**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RWY 13:** Climb heading 131° to 1800, then right turn heading 176° or as assigned by ATC, expect RADAR vectors to VOWED, thence . . . .  
**TAKEOFF RWYS 17L/R, 18:** Climb heading 176° to 1800, then heading 176° or as assigned by ATC, expect RADAR vectors to VOWED, thence . . . .  
**TAKEOFF RWY 31:** Climb heading 311° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED, thence . . . .  
**TAKEOFF RWYS 35L/R, 36:** Climb heading 356° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED, thence . . . .

. . . . on track 080° to FUNNL, then on (transition). Maintain 5000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

**PHARA TRANSITION (FUNNL3.PHARA):**

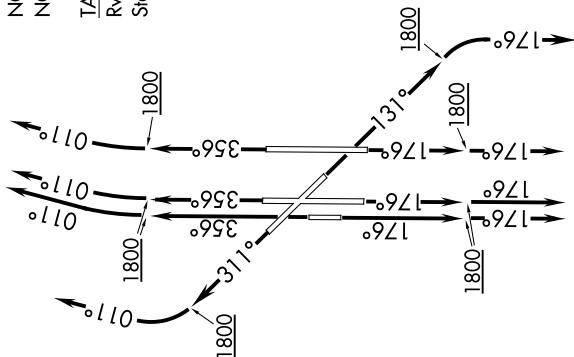

NOTE: Chart not to scale.

# FUNNL THREE DEPARTURE (RNAV)