RNAV (GPS) Y RWY 25L

PHOENIX SKY HARBOR INTL (PHX)

WAAS	APP CRS	Rwy Idg	7800
CH 82211	258°	TDZE	1126
W25B		Apt Elev	1135

RNP APCH-GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C . For inop ALS, increase visibility LPV all Cats to 1 SM, LNAV/VNAV all Cats to 1⅜ SM and LNAV Cats C/D 1¾ SM.

MALSR

MISSED APPROACH: Climb to 1900 then climbing left turn to 5000 direct CHOCK and on track 145° to BRAAK and hold.

D-ATIS	PHOENIX APP CON	PHOENIX TOWER	GND CON	CLNC DEL	CPDLC
127.575	128.65 353.9	118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	119.75 269.2 (N) 132.55 269.2 (S)	118.1 269.2	

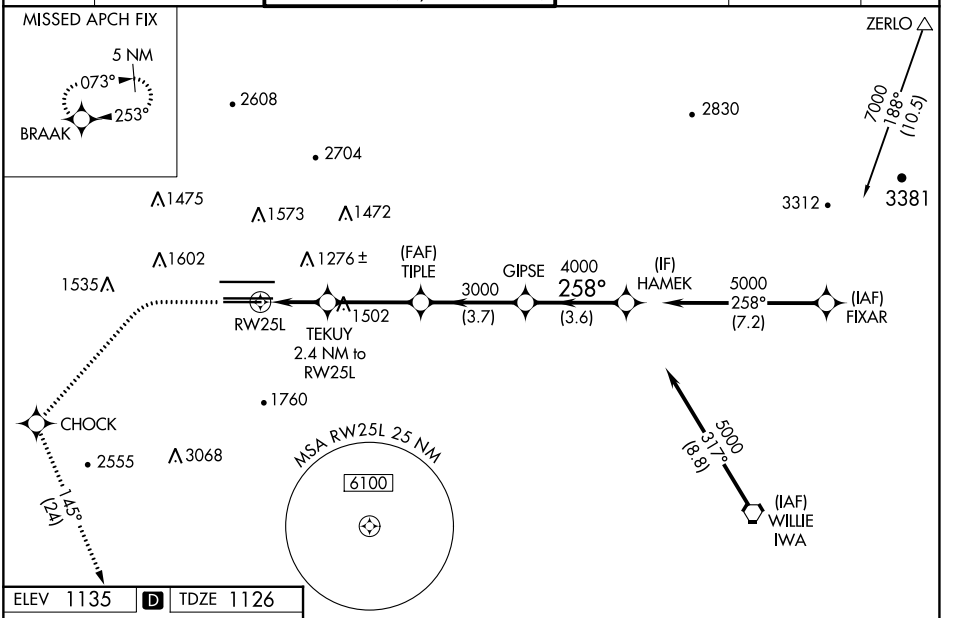

ELEV 1135 D TDZE 1126



HIRL Rwys 8-26, 7L-25R and 7R-25L
REIL Rwy 26

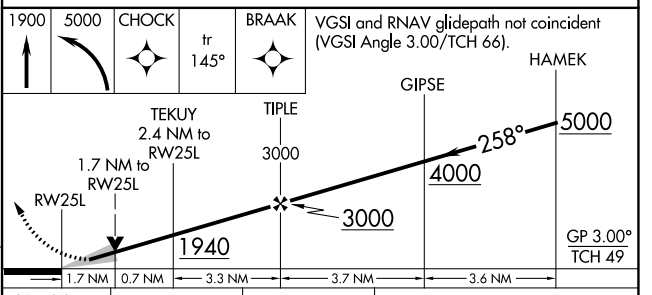

CATEGORY		A	B	C	D
LPV	DA	1449-½ 323 (400-½)			
LNAV/VNAV	DA	1589-1 463 (500-1)			1674-1⅛ 548 (600-1⅛)
LNAV	MDA	1740-½ 614 (700-½)		1740-1⅜ 614 (700-1⅜)	
C CIRCLING		1740-1 605 (700-1)		2040-2¾ 905 (1000-2¾)	2340-3 1205 (1300-3)

SW-4, 28 NOV 2024 to 26 DEC 2024
SW-4, 28 NOV 2024 to 26 DEC 2024