

(GANDY8.GANDY) 19339

AL-416 (FAA)

TAMPA INTL (TPA)  
TAMPA, FLORIDA


# GANDY EIGHT DEPARTURE (RNAV)

**TOP ALTITUDE:  
6000**

D-ATIS DEP  
128.475  
CLNC DEL  
133.6  
CPDLC  
GND CON  
121.7 269.4  
TAMPA TOWER  
119.5 269.4  
TAMPA DEP CON  
119.65 353.575

### TAKEOFF MINIMUMS:

Rwy 1L: Standard with minimum climb of 500' per NM to 3800.  
Rwy 1R: Standard with minimum climb of 500' per NM to 3900.  
Rwy 10: Standard with minimum climb of 500' per NM to 4200.  
Rwy 19L: Standard with minimum climb of 500' per NM to 4400.  
Rwy 19R: Standard with minimum climb of 500' per NM to 4400.  
Rwy 28: Standard with minimum climb of 500' per NM to 4300.

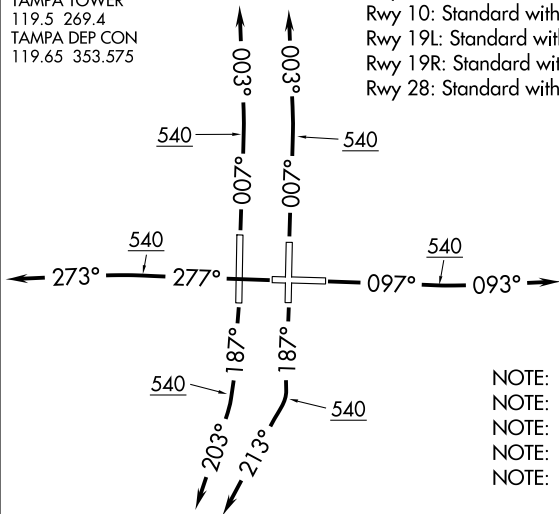

- NOTE: RNAV 1.
- NOTE: Jets only.
- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: Rwy 1L/1R expect left turn to GANDY.



### DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RWY 1L/R:** Climb on heading 007° to 540, then climb to assigned altitude on heading 003° or as assigned by ATC, thence. . . .

**TAKEOFF RWY 10:** Climb on heading 097° to 540, then climb to assigned altitude on heading 093° or as assigned by ATC, thence. . . .


**TAKEOFF RWY 19L:** Climb on heading 187° to 540, then climb to assigned altitude on heading 213° or as assigned by ATC, thence. . . .

**TAKEOFF RWY 19R:** Climb on heading 187° to 540, then climb to assigned altitude on heading 203° or as assigned by ATC, thence. . . .

**TAKEOFF RWY 28:** Climb on heading 277° to 540, then climb to assigned altitude on heading 273° or as assigned by ATC, thence. . . .

. . . .expect RADAR vectors to GANDY, then on track 162° to PAIRS. Maintain 6000 or as assigned by ATC, expect clearance to filed altitude within ten (10) minutes after departure.

**SABEE TRANSITION (GANDY8.SABEE)**

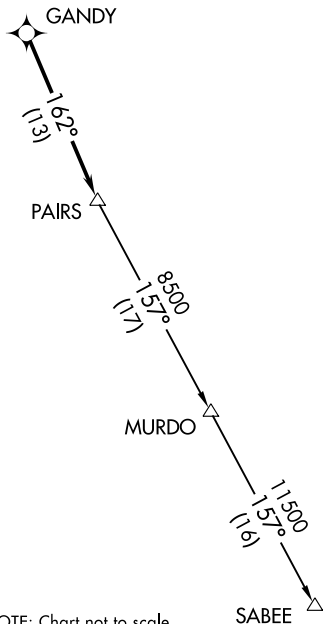

NOTE: Chart not to scale.

# GANDY EIGHT DEPARTURE (RNAV)

(GANDY8.GANDY) 03JAN19

TAMPA, FLORIDA  
TAMPA INTL (TPA)

SE-3, 28 NOV 2024 to 26 DEC 2024

SE-3, 28 NOV 2024 to 26 DEC 2024