WAAS CH 40206 W03A	APP CRS 031°	Rwy Idg 7707	TDZE 410	Apt Elev 410

RNAV (GPS) Y RWY 3L

TRI-CITIES (PSC)

RNP APCH.

T A Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C . VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibilities ⅜ mile: increase LNAV Cats C and D visibility ⅜ mile. Circling Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing right turn to 3200 direct CITYS and hold.

ATIS	SPOKANE APP CON ★	TRI-CITIES TOWER ★	GND CON	CLNC DEL	UNICOM
125.65	128.75 377.2	135.3 (CTAF) L 323.3	121.8	120.0	122.95

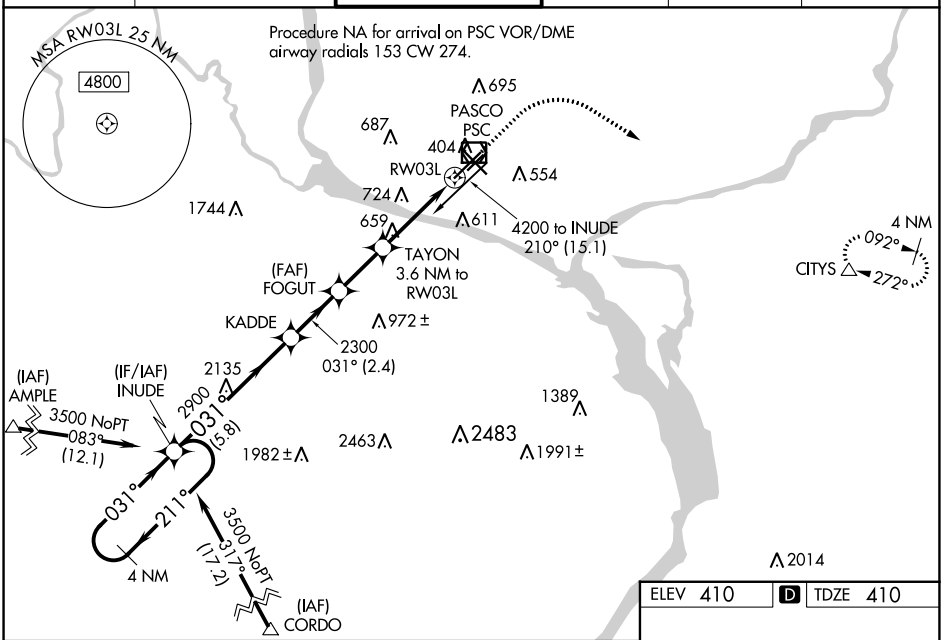

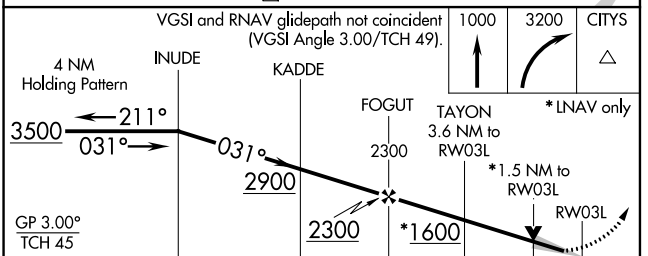

CATEGORY	A	B	C	D
LPV DA	610-¾ 200 (200-¾)			
LNAV/VNAV DA	708-1 298 (300-1)			
LNAV MDA	920-1 510 (600-1)		920-1⅜ 510 (600-1⅜)	
C CIRCLING	920-1 510 (600-1)	940-1 530 (600-1)	1040-1¾ 630 (700-1¾)	1100-2¼ 690 (700-2¼)

ELEV 410 D TDZE 410



REIL Rwys 3L and 12
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L

NW-1, 28 NOV 2024 to 26 DEC 2024
NW-1, 28 NOV 2024 to 26 DEC 2024