

CLOVIS, NEW MEXICO

RNAV (GPS) RWY 13

| | | |
|----------|------------|------|
| APCH CRS | Rwy Idg | 8196 |
| 128° | TDZE | 4294 |
| | Arprt Elev | 4295 |

AL-512 (USAF)

CANNON AFB (KCVS)


RNP APCH

SSALR

MISSED APPROACH: Climb to 7000 direct HOMEP, then track 128° to SOPLE and hold.

* When ALS inop increase vis to 1 3/8 miles.
 ** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1 1/2 miles.



| | | | | |
|---------------------|---------------------------------|-----------------------|------------------------|---------------------------|
| ATIS 119.1 269.9 | CANNON APP CON 118.425 352.1 | TOWER 120.4 270.25 | GND CON 121.9 275.8 | CLNC DEL 120.2 293.225 |
|---------------------|---------------------------------|-----------------------|------------------------|---------------------------|

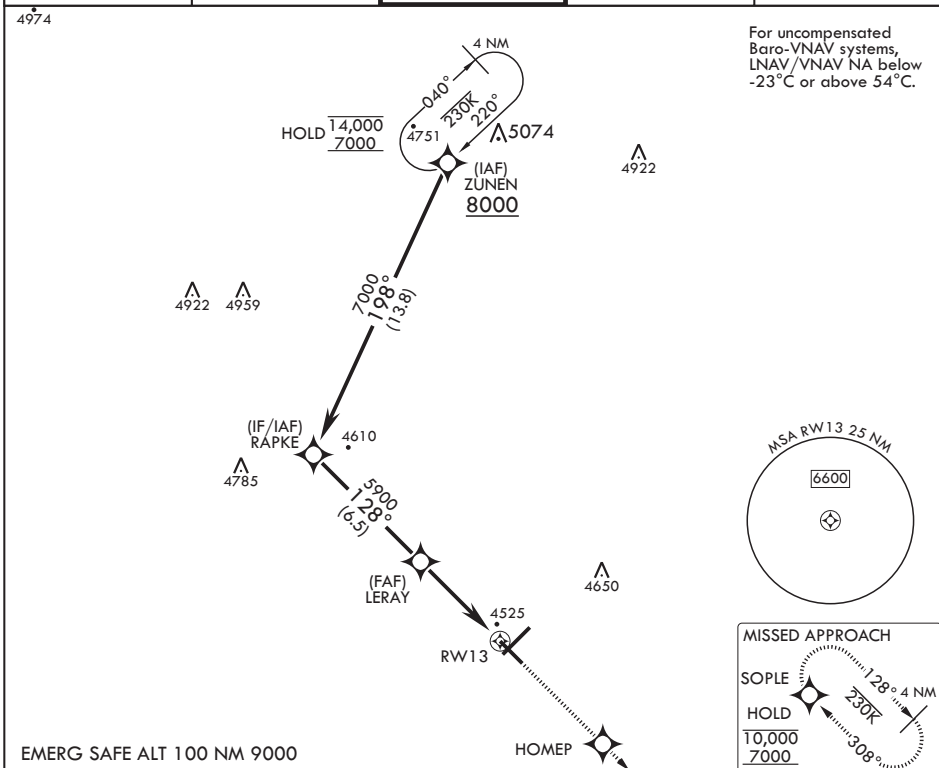

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C.

EMERG SAFE ALT 100 NM 9000

| | | | | | | | |
|-------|--|------|-------|---------|-------|-----------|-----------|
| RAPKE | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37). | 7000 | HOMEP | tr 128° | SOPLE | ELEV 4295 | TDZE 4294 |
|-------|--|------|-------|---------|-------|-----------|-----------|

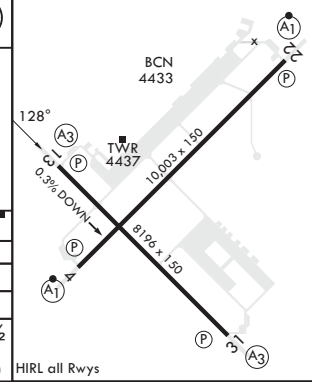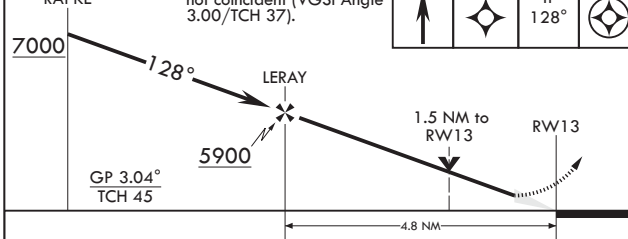

| CATEGORY | A | B | C | D | E |
|-------------------|------------------------|---|----------------------------|----------------------------|----------------------------|
| LNAV/VNAV DA* | 4766-1 | | 472 | (500-1) | |
| LNAV MDA** | 4820-1/2 526 (600-1/2) | | 4820-1 | 526 | (600-1) |
| C CIRCLING | 4840-1 545 (600-1) | | 4860-1 1/2 565 (600-1 1/2) | 5000-2 1/4 705 (800-2 1/4) | 5020-2 1/2 725 (800-2 1/2) |

HIRL all Rwy's

CLOVIS, NEW MEXICO

34°23'N - 103°19'W

CANNON AFB (KCVS)

Amdt 4 07OCT21

RNAV (GPS) RWY 13

SW-1, 28 NOV 2024 to 26 DEC 2024

SW-1, 28 NOV 2024 to 26 DEC 2024