

LOC/DME I-ARK 110.95 Chan 46(Y)	APP CRS 185°	Rwy Idg TDZE Apt Elev	9001 90 96
--	------------------------	-----------------------------	---------------------------------------

ILS RWY 17L (SA CAT I)

ORLANDO INTL (MCO)



RNAV 1-DME/DME/IRU or GPS or RADAR required for procedure entry.
DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 500 then
climbing left turn to 3000 on heading 100°
and ORL VORTAC R-140 to PRESK INT/ORL
16.2 DME and hold, continue climb-in-
hold to 3000.

▲ Bright lights on highway midway between Rwy 17L and Rwy 17R may
be mistaken for runway lights. Simultaneous approach authorized.
Requires specific OPSPEC, MSPEC, or LOA approval.


D-ATIS ARR 121.25 DEP 120.525	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (Rwys 17L-35R, 17R-35L) 124.3 253.5 (Rwys 18L-36R, 18R-36L)	GND CON 126.4 (East) 121.8 (West)	CLNC DEL 134.7 341.7	CPDLC
---	---------------------------------------	--	---	--	-------

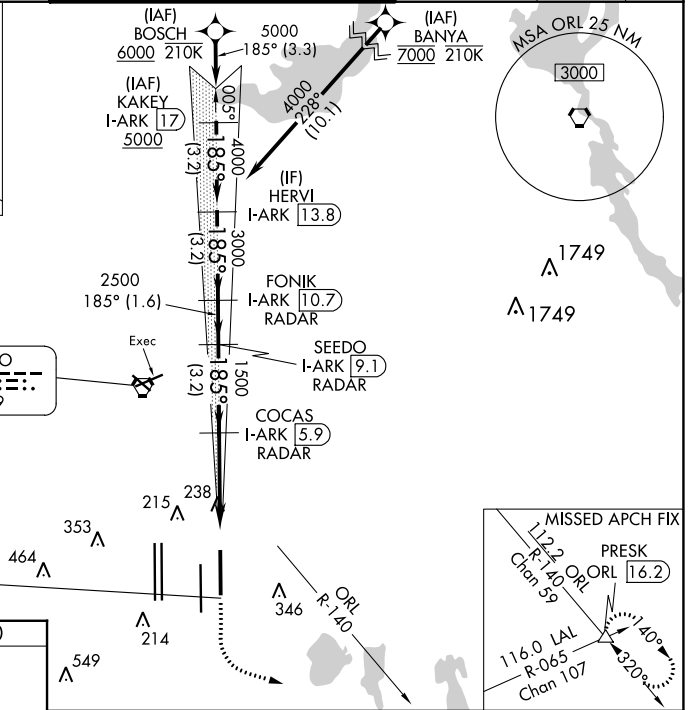


SE-3, 28 NOV 2024 to 26 DEC 2024

SE-3, 28 NOV 2024 to 26 DEC 2024

ELEV 96	D	TDZE 90
---------	----------	---------

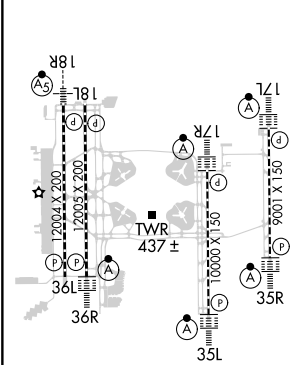

HIRL all Rwys
REIL Rwy 36L
TDZ/CL Rwys 17L/R, 18R, 35L/R
and 36R

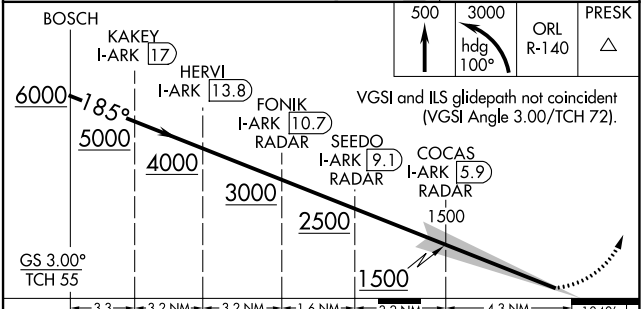

3.3	3.2	3.2	1.6	3.2	4.3	1.040
CATEGORY	A	B	C	D		
S-ILS 17L	RA 145/14 150 DA 240					
SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED						