





| | | |
|--|------------------------|---|
| WAAS CH 40111 W21A | APP CRS 206° | Rwy Idg 9002 TDZE 4735 Apt Elev 4744 |
|--|------------------------|---|

RNAV (GPS) Y RWY 21

IDAHO FALLS RGNL (IDA)

| | | |
|--|-----------|--|
| RNP APCH-GPS. | MALSR | MISSED APPROACH: Climb to 7500 direct UGADE and on track 250° to ROCCA and hold. |
| Circling to Rwy 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 54°C. For inop ALS increase LNAV/VNAV visibility all to RVR 4500, and LNAV visibility Cats C and D to RVR 5500. | | |

| | | | | | | |
|------------------------|--|--|-------------------------|--------------------------|-----------------------|-------------------------|
| ATIS 135.325 | SALT LAKE CENTER 128.35 239.25 | IDAHO FALLS TOWER * 118.5 (CTAF) 0 257.8 | GND CON 121.7 | CLNC DEL 121.7 | GCO 121.725 | UNICOM 122.95 |
|------------------------|--|--|-------------------------|--------------------------|-----------------------|-------------------------|

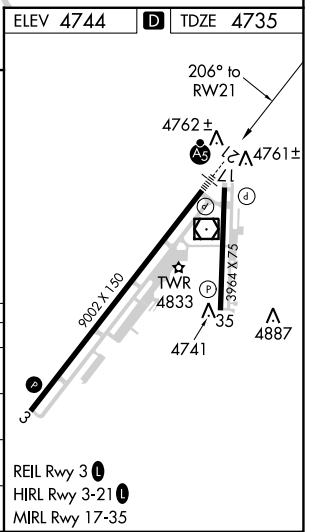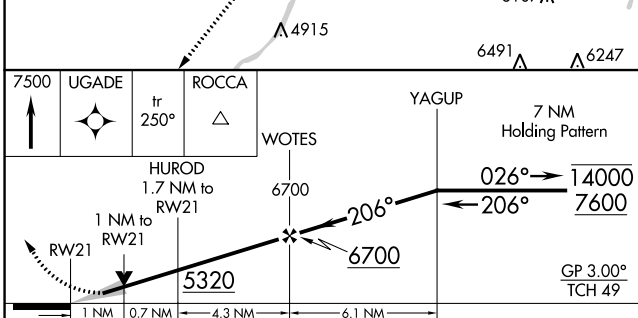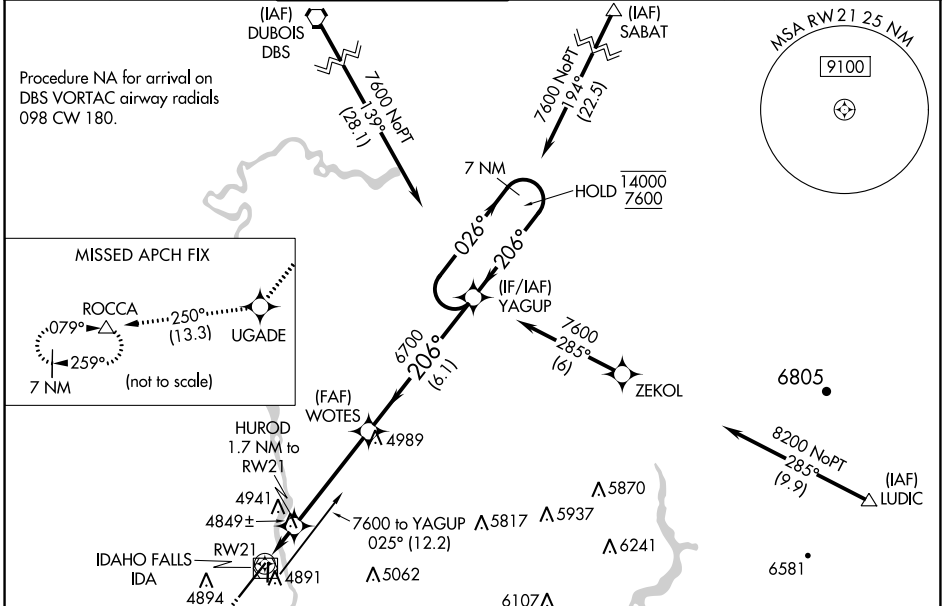

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA | | 4985/24 | 250 (300-½) | |
| LNAV/VNAV DA | | 5016/24 | 281 (300-½) | |
| LNAV MDA | 5100/24 | 365 (400-½) | 5100/35 | 365 (400-¾) |
| CIRCLING | 5200-1 456 (500-1) | 5300-1 556 (600-1) | 5400-1¾ 656 (700-1¾) | 5420-2¼ 676 (700-2¼) |

NW-1, 28 NOV 2024 to 26 DEC 2024

NW-1, 28 NOV 2024 to 26 DEC 2024