

LOC/DME I-VAC 110.75 Chan 44 (Y)	APP CRS 006°	Rwy Idg 8000
		TDZE 873
		Apt Elev 896

ILS or LOC RWY 36L


CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

Simultaneous approach authorized with Rwy 36C and 36R. DME required.


ALSIF-2

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 via heading 270° and CVG R-294 to JADRO/CVG 16 DME and hold.

D-ATIS ARR 134.375 DEP 135.3	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)	GND CON 121.7	CLNC DEL 127.175	CPDLC
---	--	---	-------------------------	----------------------------	-------

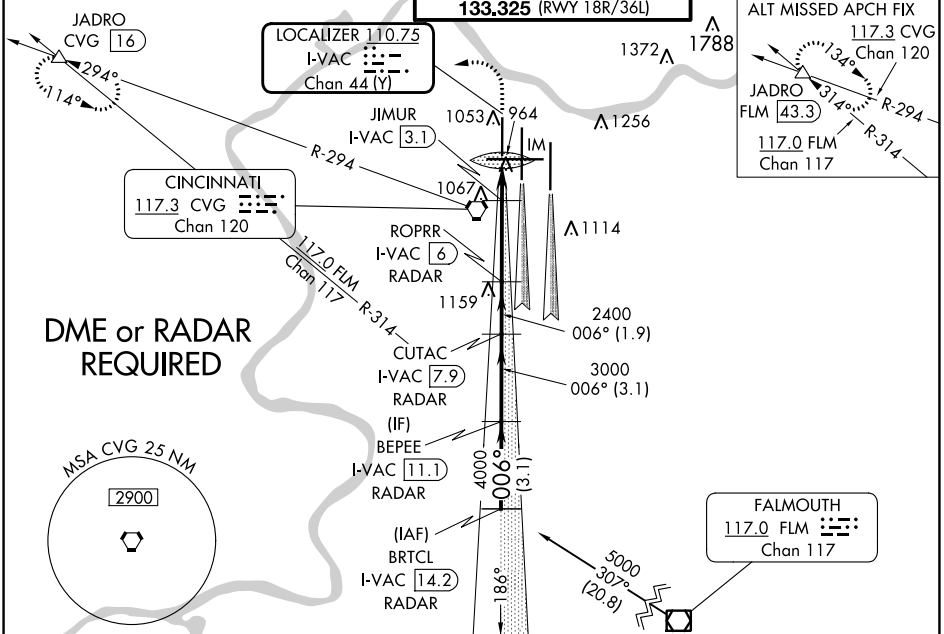

BRTCL I-VAC 14.2	1300	3000	CVG R-294	JADRO	ELEV 896	TDZE 873
Procedure Turn NA	RADAR BEPEE I-VAC 11.1	CUTAC RADAR I-VAC 7.9	ROPRR I-VAC 6	JIMUR I-VAC 3.1	**LOC only.	
GS 3.00° TCH 55	5000	4000	3000	006°	2400	2400
	3.1 NM	3.1 NM	1.9 NM	2.9 NM	0.7	0.2
CATEGORY	A	B	C	D		
S-ILS 36L	1073/18		200 (200-½)			
S-LOC 36L	1440/24		567 (600-½)		1440/60 567 (600-1¼)	
CIRCLING	1460-1		564 (600-1)		1560-1¾ 664 (700-1¾) 1560-2 664 (700-2)	
JIMUR FIX MINIMUMS						
S-LOC 36L	1220/24		347 (400-½)		1220/30 347 (400-¾)	
CIRCLING	1460-1		564 (600-1)		1560-1¾ 664 (700-1¾) 1560-2 664 (700-2)	

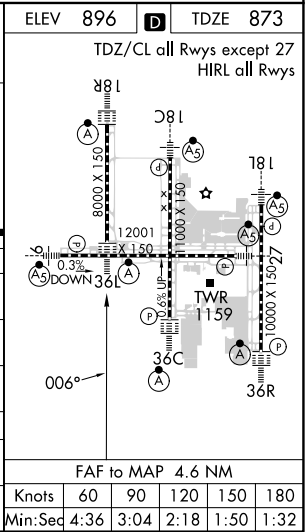

SE-1, 28 NOV 2024 to 26 DEC 2024

SE-1, 28 NOV 2024 to 26 DEC 2024