LOC I-RAL	APP CRS	Rwy Idg	5401
110.9	089°	TDZE	795
		Apt Elev	819

ILS or LOC RWY 9
RIVERSIDE MUNI (RAL)

Circling NA north of Rwy 9-27 for Cat D. When local altimeter setting not received, use Chino altimeter setting and increase all DA 46 feet and all MDA 60 feet, increase S-ILS 9 visibility ⅛ mile all Cats, S-LOC 9 Cat C/D visibility ⅛ mile. Autopilot coupled approach NA below 1192.
*Missed approach requires minimum climb of 270 feet per NM to 2500.

MISSED APPROACH: Climb to 2000 then climbing right turn to 4200 on PDZ VORTAC R-098 to PDZ VORTAC then on PDZ VORTAC R-256 to WISUP INT/PDZ VORTAC 9.4 DME and hold.

ATIS	SOCAL APP CON	RIVERSIDE TOWER ★	GND CON	UNICOM
128.8	135.4 377.125	121.0 (CTAF) L 257.8	124.12	122.95

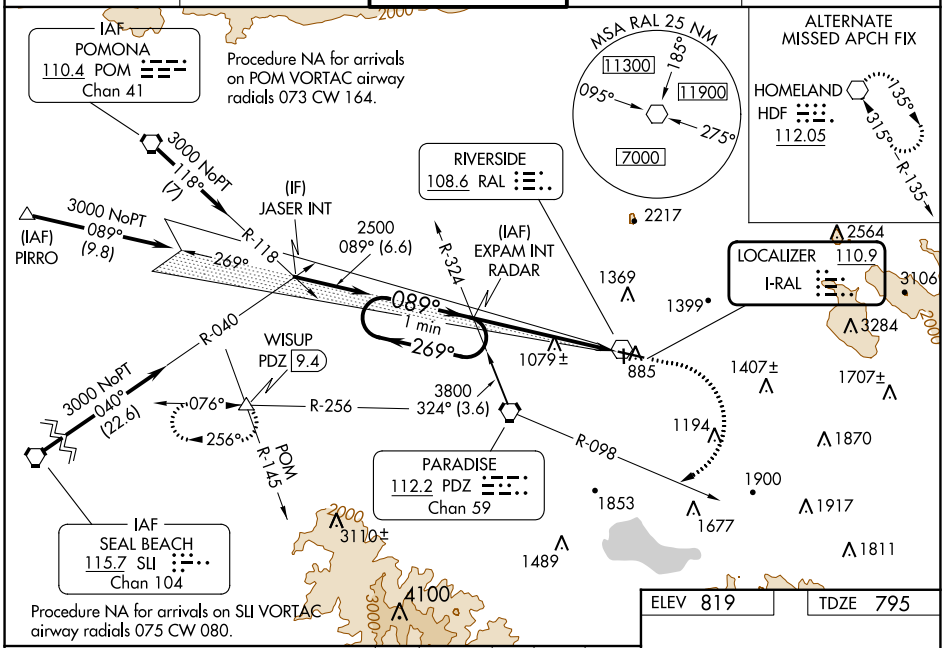

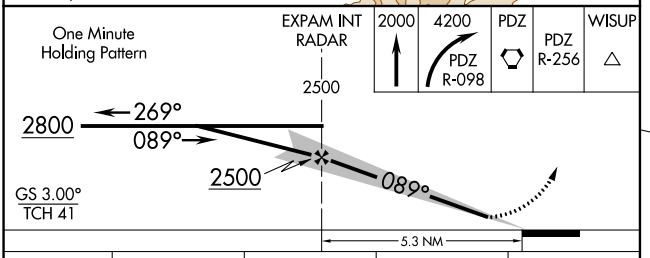



CATEGORY	A	B	C	D
S-ILS 9*	995-¾ 200 (200-¾)			
S-ILS 9	1131-1 336 (400-1)			
S-LOC 9*	1280-1 485 (500-1)		1280-1⅜ 485 (500-1⅜)	
S-LOC 9	1360-1 565 (600-1)		1360-1⅝ 565 (600-1⅝)	
CIRCLING	1360-1 541 (600-1)	1680-1¼ 861 (900-1¼)	1800-3 981 (1000-3)	1960-3 1141 (1200-3)

MIRL Rwys 9-27 and 16-34 L

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

SW-3, 28 NOV 2024 to 26 DEC 2024
SW-3, 28 NOV 2024 to 26 DEC 2024