LOC/DME I-MVP	APP CRS	Rwy Idg	7302
111.55	196°	TDZE	1320
Chan 52 (Y)		Apt Elev	1333

ILS or LOC RWY 19L

WICHITA DWIGHT D EISENHOWER NTL (ICT)

T A ADF required. Simultaneous approach authorized with ILS or LOC RWY 19R. For inoperative MALSR, increase S-ILS 19L Cat E visibility to ¾ mile, S-LOC 19L Cat E visibility to 1⅜ mile, NUMAE fix minimums: S-LOC 19L Cat C/D/E visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 3000 direct PICHE LOM and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON	CLNC DEL
125.15	126.7 353.5	118.2 257.8	121.9 348.6	125.7

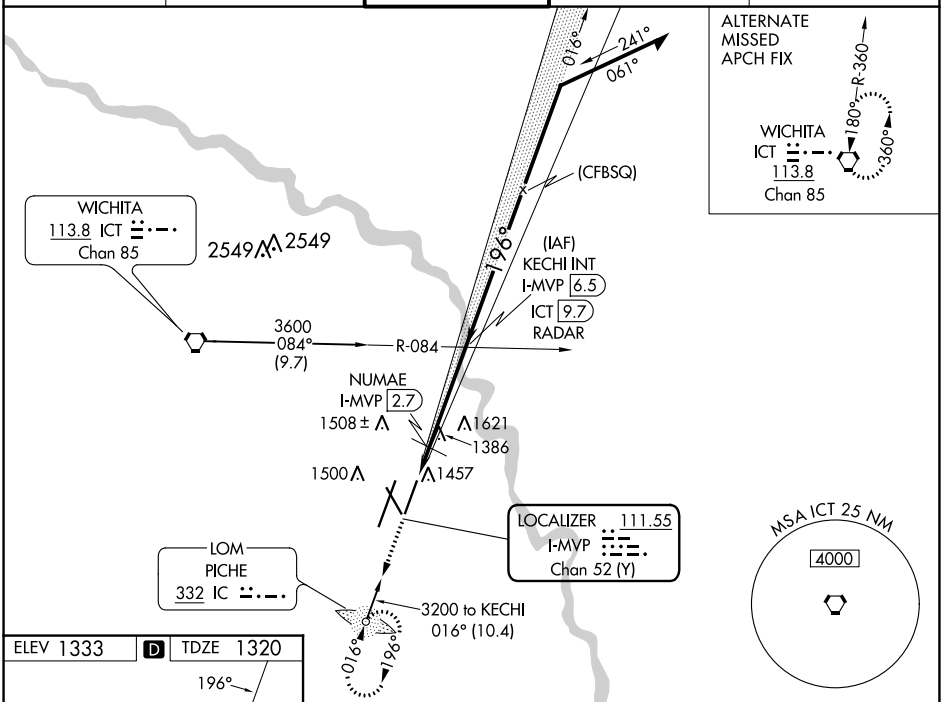

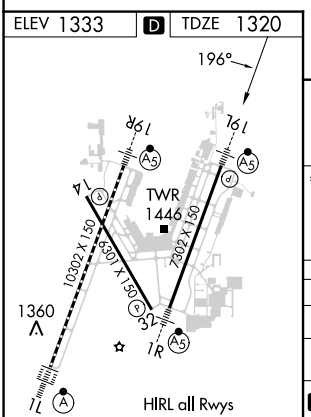

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

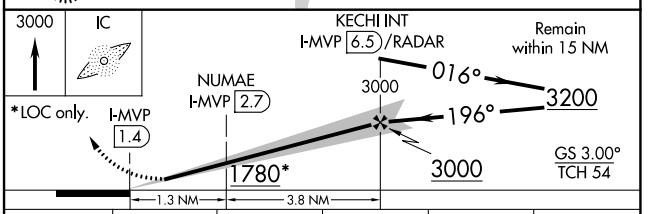

CATEGORY	A	B	C	D	E
S-ILS 19L	1520-½ 200 (200-½)				
S-LOC 19L	1780-½ 460 (500-½)		1780-⅞ 460 (500-⅞)		
C CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)
NUMAE FIX MINIMUMS (DME REQUIRED)					
S-LOC 19L	1700-½ 380 (400-½)		1700-⅝ 380 (400-⅝)		
C CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)

NC-2, 28 NOV 2024 to 26 DEC 2024
NC-2, 28 NOV 2024 to 26 DEC 2024