

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 28 NOV 2024 to 26 DEC 2024

D-ATIS 119.95
 CLNC DEL 121.85 (when tower closed)
 GND CON 121.85
 COUNTY TOWER * 118.5 (CTAF)
 CLEVELAND DEP CON 125.35 346.325

TAKEOFF MINIMUMS:

Rwys 6, 24: Standard with a minimum climb of 500' per NM to 1400.


TOP ALTITUDE: ASSIGNED BY ATC

NOTE: RADAR required.


NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: PUUJL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

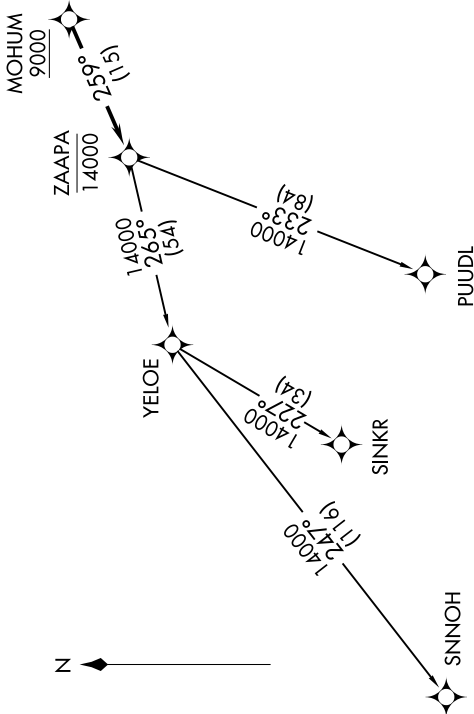

NOTE: Chart not to scale.

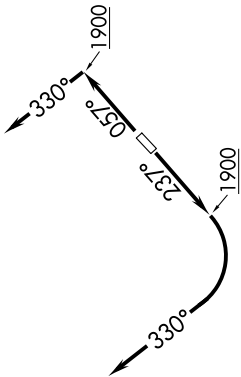

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb on heading 057° to 1900, then on heading 330° or as assigned by ATC for RADAR vectors to cross **MOHUM** at or above 9000, thence....

TAKEOFF RUNWAY 24: Climb on heading 237° to 1900, then right turn heading 330° or as assigned by ATC for RADAR vectors to cross **MOHUM** at or above 9000, thence....

....on track 259° to cross **ZAAPA** at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

- PUUJL TRANSITION (ZAAPA5.PUUJL)
- SINKR TRANSITION (ZAAPA5.SINKR)
- SNNOH TRANSITION (ZAAPA5.SNNOH)

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 28 NOV 2024 to 26 DEC 2024