
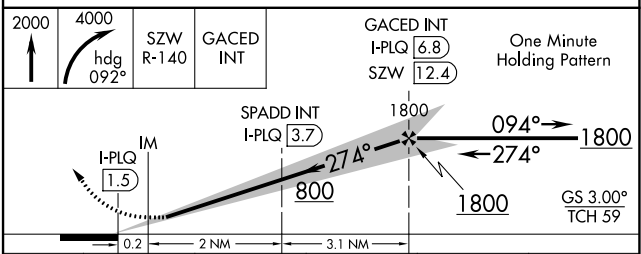
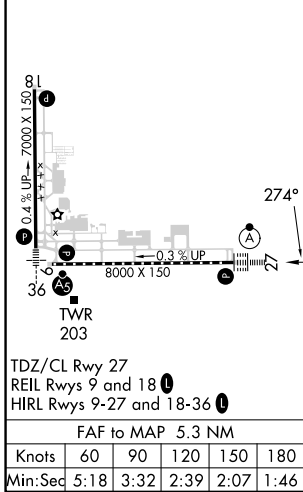


| | | | |
|---|------------------------|-----------------------------|---------------------------------------|
| LOC/DME I-PLQ 111.9 Chan 56 | APP CRS 274° | Rwy Idg TDZE Apt Elev | 8000 58 83 |
|---|------------------------|-----------------------------|---------------------------------------|

ILS or LOC RWY 27

TALLAHASSEE INTL (TLH)

| | | | | | | |
|---|------------|---|---|--|-------------------------------|---------------------------------|
| DME required. | ALSF-2 | MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 092° and on SZW VORTAC R-140 to GACED INT/SZW 12.4 DME and hold, continue climb-in-hold to 4000. | | | | |
| For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cats C, D and E visibility to 2 SM. SPADD FIX MINIMUMS S-LOC 27 Cat E visibility to RVR 4000. | | ATIS 119.45 239.25 | TALLAHASSEE APP CON ★ 135.8 317.4 | TALLAHASSEE TOWER ★ 118.7 (CTAF) 257.8 | GND CON 121.9 348.6 | CLNC DEL 126.65 275.8 |

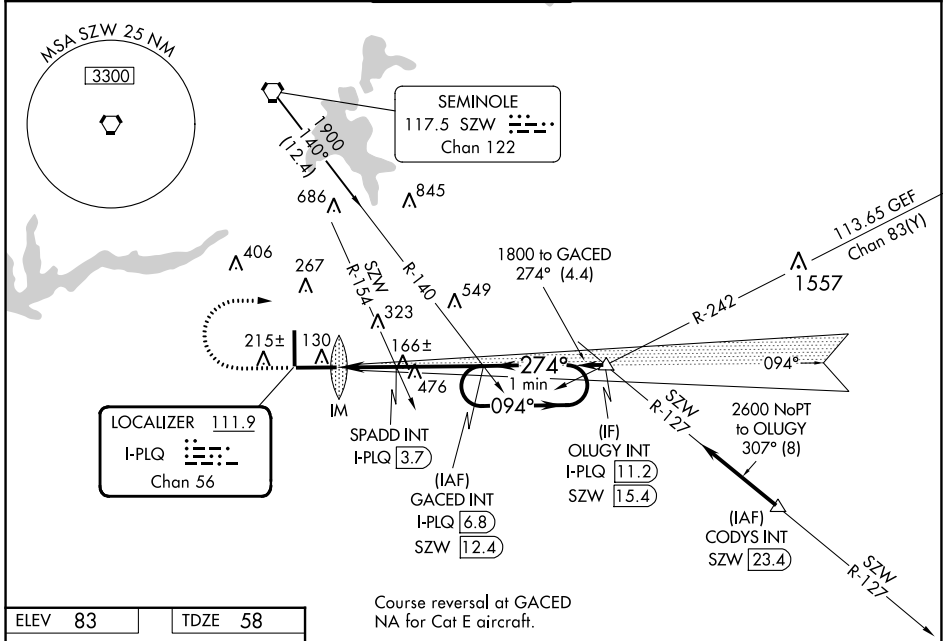

| CATEGORY | A | B | C | D | E |
|--------------------|-----------------------|------------------------|----------------------|------------------------|------------------------|
| S-ILS 27 | 258/18 200 (200-½) | | | | |
| S-LOC 27 | 800/24 742 (800-½) | 800/40 742 (800-¾) | 800-1¾ 742 (800-1¾) | | |
| CIRCLING | 800-1 717 (800-1) | 800-1¼ 717 (800-1¼) | 800-2 717 (800-2) | 800-2¼ 717 (800-2¼) | 1000-3 917 (1000-3) |
| SPADD FIX MINIMUMS | | | | | |
| S-LOC 27 | 740/24 | 682 (700-½) | 740-1½ | 682 (700-1½) | |
| CIRCLING | 740-1 | 657 (700-1) | 740-2 657 (700-2) | 800-2¼ 717 (800-2¼) | 1000-3 917 (1000-3) |

SE-3, 28 NOV 2024 to 26 DEC 2024

SE-3, 28 NOV 2024 to 26 DEC 2024