


LOC I-HIB 108.75	APP CRS 310°	Rwy Idg TDZE Apt Elev	6758 1345 1354
----------------------------	------------------------	-----------------------------	---

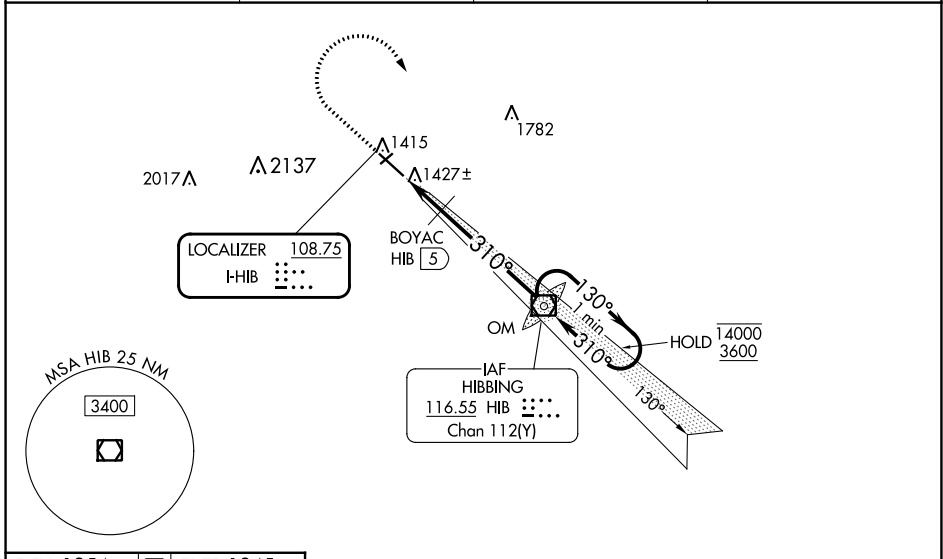
ILS or LOC RWY 31

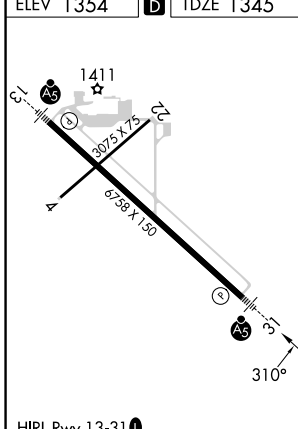
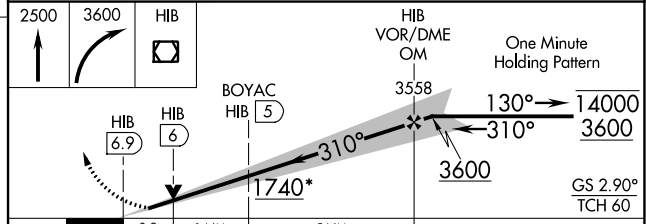
RANGE RGNL (HIB)

⚠ VDP NA when using Eveleth altimeter setting. Caution opposing ILS continuously on. When local altimeter setting not received, use Eveleth altimeter setting and increase S-ILS 31 DA to 1581 feet; increase all MDAs 40 feet and increase S-LOC 31 Cat C/D visibility 1/2 SM and Circling Cat C 1/4 SM. Increase BOYAC fix minimums S-LOC 31 Cat C/D visibility 1/2 SM and Circling Cat C 1/4 SM. #DME from HIB VOR/DME. DME use requires simultaneous reception of I-HIB and HIB DME. *1780 when using Eveleth altimeter setting, increase BOYAC fix minimums S-LOC 31 Cat C/D visibility to 1 SM.

MALS
 MISSED APPROACH: Climb to 2500 then climbing right turn to 3600 direct HIB VOR/DME and hold.

ASOS 126.425	DULUTH APP CON 125.45 233.7	CLNC DEL 127.4	UNICOM 123.0 (CTAF)
------------------------	---------------------------------------	--------------------------	-------------------------------



ELEV 1354	D	TDZE 1345	2500	3600	HIB	HIB VOR/DME OM	One Minute Holding Pattern
							
CATEGORY	A	B	C	D			
S-ILS 31	1545-1/2		200 (200-1/2)				
S-LOC 31	1740-1/2	395 (400-1/2)	1740-5/8	395 (400-5/8)			
CIRCLING	1900-1	546 (600-1)	1920-1 1/2	566 (600-1 1/2)	1980-2	626 (700-2)	
# BOYAC FIX MINIMUMS							
S-LOC 31	1680-1/2		335 (400-1/2)				
CIRCLING	1900-1	546 (600-1)	1920-1 1/2	566 (600-1 1/2)	1980-2	626 (700-2)	
HIRL Rwy 13-31		FAF to MAP 6.9 NM					
Knots	60	90	120	150	180		
Min:Sec	6:54	4:36	3:27	2:46	2:18		

NC-1, 28 NOV 2024 to 26 DEC 2024

NC-1, 28 NOV 2024 to 26 DEC 2024