

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 28 NOV 2024 to 26 DEC 2024

TOP ALTITUDE: ASSIGNED BY ATC

ATIS 125.25
 CLNC DEL 339.8
 121.9 (when tower closed)
 GND CON 121.9 339.8
 LAKEFRONT TOWER ★ 124.3 (CTAF) 339.8
 CLEVELAND DEP CON 125.35 346.325

TAKEOFF MINIMUMS:


Rwy 6L/R, 24R: Standard with a minimum climb of 500' per NM to 1100.
 Rwy 24L: 400-1 $\frac{3}{4}$ or standard with minimum climb of 757' per NM to 1000.

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: PUIJDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

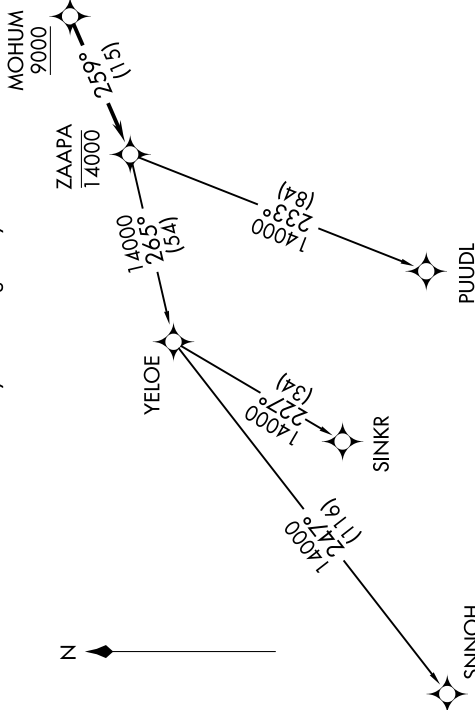

NOTE: Chart not to scale.

▼ DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6L/R: Climb on heading 066° to 1100, then on heading 350° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....

TAKEOFF RUNWAY 24L/R: Climb on heading 246° to 1100, then right turn heading 350° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUIJDL TRANSITION (ZAAPA5.PUIJDL)

SINKR TRANSITION (ZAAPA5.SINKR)

SNNOH TRANSITION (ZAAPA5.SNNOH)

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 28 NOV 2024 to 26 DEC 2024