

| | | | |
|--|------------------------|-----------------------------|---|
| LOC/DME I-MAY 108.55 Chan 22 (Y) | APP CRS 070° | Rwy Idg TDZE Apt Elev | 5001 1307 1307 |
|--|------------------------|-----------------------------|---|

ILS or LOC RWY 7




WEXFORD COUNTY (CAD)

ADF required. RADAR required for procedure entry.

MALSF MISSED APPROACH: Climb to 2400 then climbing right turn to 3200 direct WEXOR. LOM/I-MAY 6.5 DME and hold.

NA Circling NA to Rwys 18 and 36. Inop table does not apply to S-ILS 7 all Cats.
For inop ALS, increase S-LOC 7 Cat C/D visibility to 1 1/8 SM.

| | | |
|---------------------------|--|--|
| AWOS-3P 128.325 | MINNEAPOLIS CENTER 132.9 338.3 | UNICOM 122.8 (CTAF) 0 |
|---------------------------|--|--|

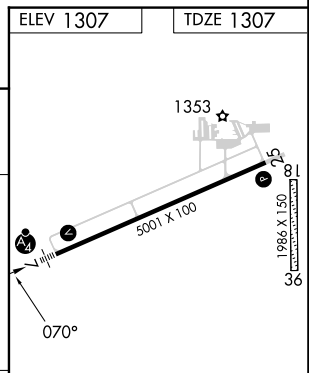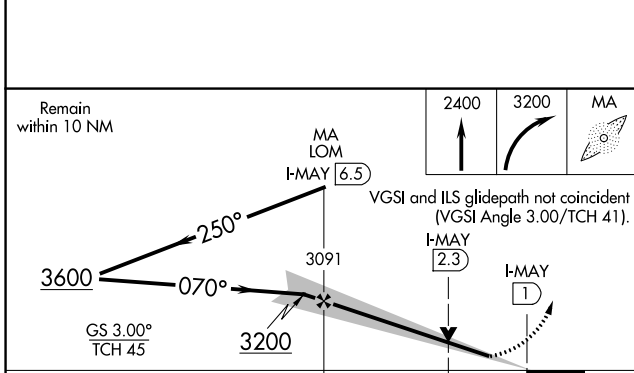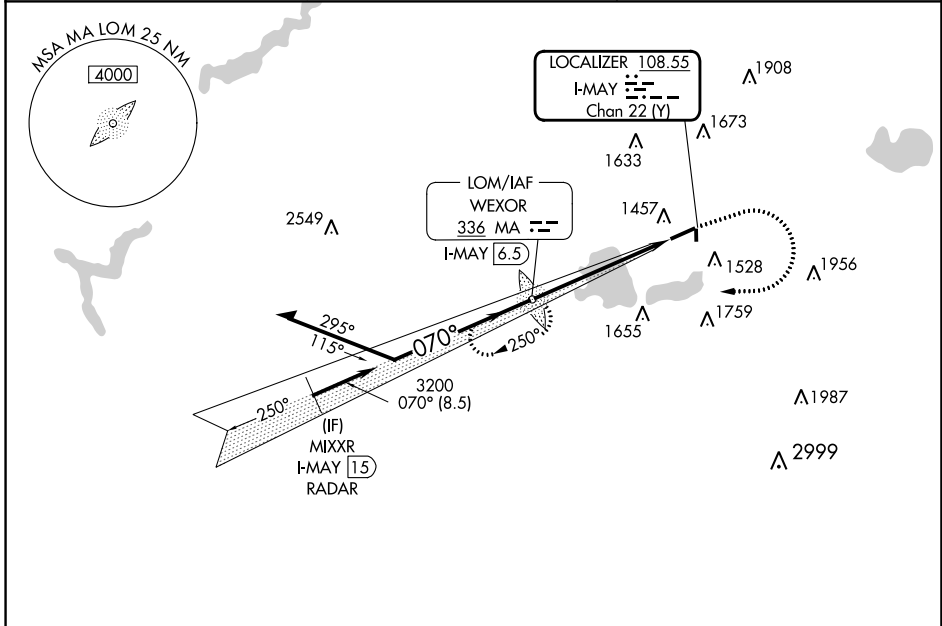

| CATEGORY | A | B | C | D |
|-------------------|------------------------|---|---|---|
| S-ILS 7 | 1507-3/4 | | 200 (200-3/4) | |
| S-LOC 7 | 1760-3/4 453 (500-3/4) | | 1760-1 453 (500-1) | |
| C CIRCLING | 1840-1 533 (600-1) | | 2040-2 733 (800-2) 2060-2 1/2 753 (800-2 1/2) | |

| | | | | | |
|-----------------------------|------|------|------|------|------|
| HIRL Rwy 7-25 0 | | | | | |
| REIL Rwys 7 and 25 0 | | | | | |
| FAF to MAP 5.5 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:30 | 3:40 | 2:45 | 2:12 | 1:50 |