

| | | | |
|---------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS CH 72806 W18A | APP CRS 176° | Rwy Idg TDZE Apt Elev | 6500 414 425 |
|---------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 18

ROSCOE TURNER (CRX)


RNP APCH-GPS.

Baro-VNAV NA when using Selmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP NA when using Selmer altimeter setting. When local altimeter setting not received, use Selmer altimeter setting and increase LPV DA to 682 feet, increase LNAV/VNAV DA to 812 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ¾ SM and Circling visibility Cats C and D 1½ SM. For inop ALS when using Selmer altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV visibility Cats C and D to 1½ SM.




MALSRL

MISSED APPROACH:
Climb to 3000 direct WEDGO and hold.

| | | |
|----------------------------|---------------------------------------|---------------------------------|
| AWOS-3PT 118.675 | MEMPHIS CENTER 135.9 273.55 | UNICOM 122.8 (CTAF) 0 |
|----------------------------|---------------------------------------|---------------------------------|

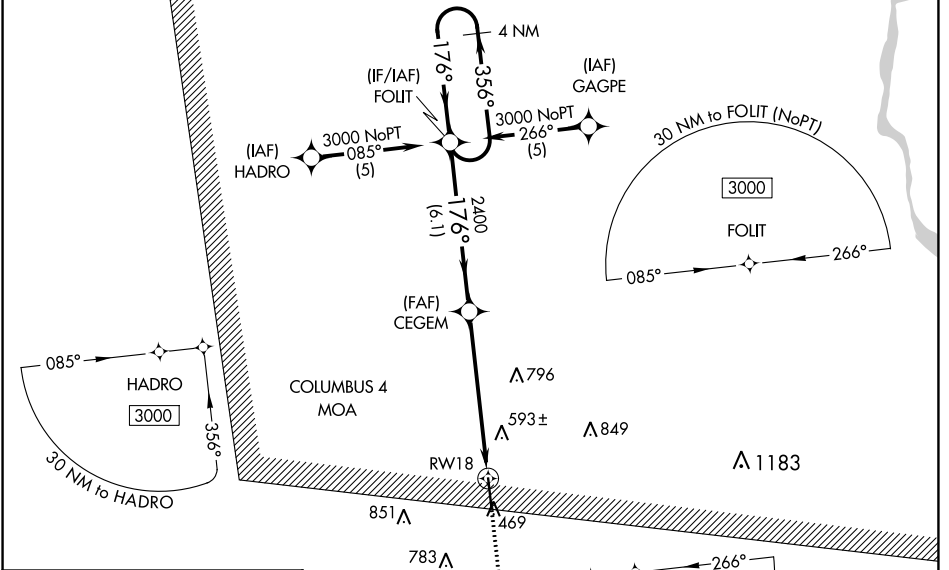

| | |
|----------|----------|
| ELEV 425 | TDZE 414 |
|----------|----------|

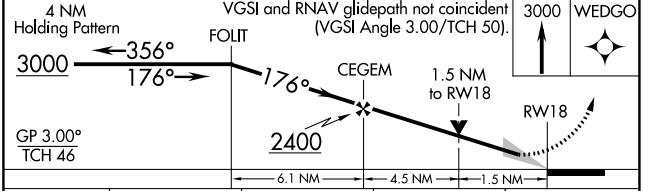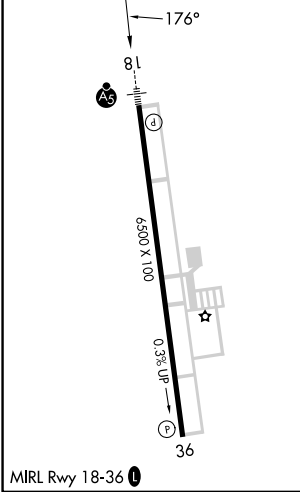

| CATEGORY | A | B | C | D |
|----------------------------------------------|-------|-------------|-----------------------|-------------------------|
| LPV DA | | 614-½ | 200 (200-½) | |
| LNAV/VNAV DA | | 744-½ | 330 (400-½) | |
| LNAV MDA | 940-½ | 526 (600-½) | 940-1 | 526 (600-1) |
| <input checked="" type="checkbox"/> CIRCLING | 940-1 | 515 (600-1) | 1100-2 675 (700-2) | 1160-2¼ 735 (800-2¼) |

SC-4, 28 NOV 2024 to 26 DEC 2024

SC-4, 28 NOV 2024 to 26 DEC 2024