WAAS	APP CRS	Rwy Idg	4201
CH 72709	272°	TDZE	912
W27A		Apt Elev	913

RNAV (GPS) RWY 27

DE KALB TAYLOR MUNI (DKB)

When local altimeter setting not received, use Aurora altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase all LPV and LNAV/VNAV visibilities, LNAV Cats C/D visibility, and Circling Cats C/D visibility ¼ mile. Baro-VNAV NA when using Aurora altimeter setting. VDP NA when using Aurora altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 47° C (116° F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct JADIS and via 305° track to SIMMN and hold.

AWOS-3	CHICAGO APP CON	UNICOM
119.075	133.5 349.0	122.7 (CTAF) L

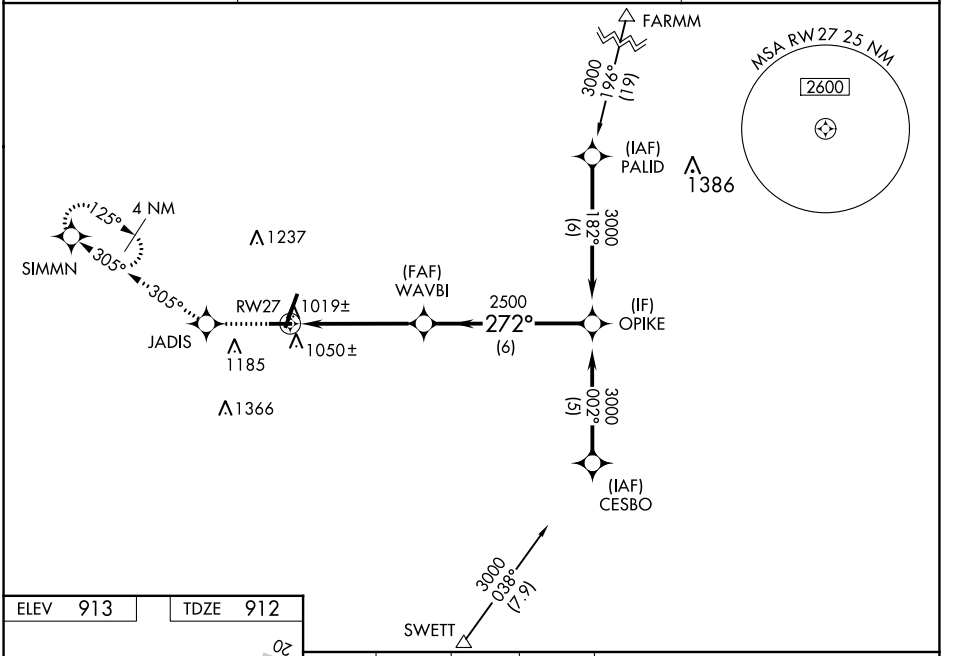

ELEV 913	TDZE 912



REIL Rwys 9, 20 and 27 L
MIRL Rwys 2-20
MIRL Rwys 9-27 L

3000	JADIS	305° tr	SIMMN

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).

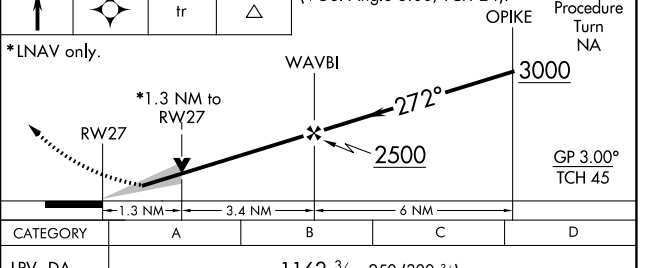

CATEGORY	A	B	C	D
LPV DA	1162-¾ 250 (300-¾)			
LNAV/VNAV DA	1317-1½ 405 (500-1½)			
LNAV MDA	1360-1 448 (500-1)		1360-1¼ 448 (500-1¼)	1360-1½ 448 (500-1½)
CIRCLING	1360-1 447 (500-1)	1500-1 587 (600-1)	1600-2 687 (700-2)	1740-2¾ 827 (900-2¾)

EC-3, 28 NOV 2024 to 26 DEC 2024
EC-3, 28 NOV 2024 to 26 DEC 2024