WAAS	APP CRS	Rwy Idg	5001
CH 53738	100°	TDZE	197
W10A		Apt Elev	197

RNAV (GPS) RWY 10

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)

Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Use Claxton altimeter setting; when not received, use Vidalia altimeter setting and increase LPV DA to 543, LNAV/VNAV DA to 500, increase all MDA 20 feet, increase LNAV Cat C/D visibility ⅛ mile and Circling Cat C/D visibility ¼ mile.

NA

MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct LOTTS and hold.

AWOS-3PT	CWV AWOS-3	JACKSONVILLE CENTER	UNICOM
120.3	120.075	132.925 363.2	123.0 (CTAF) L

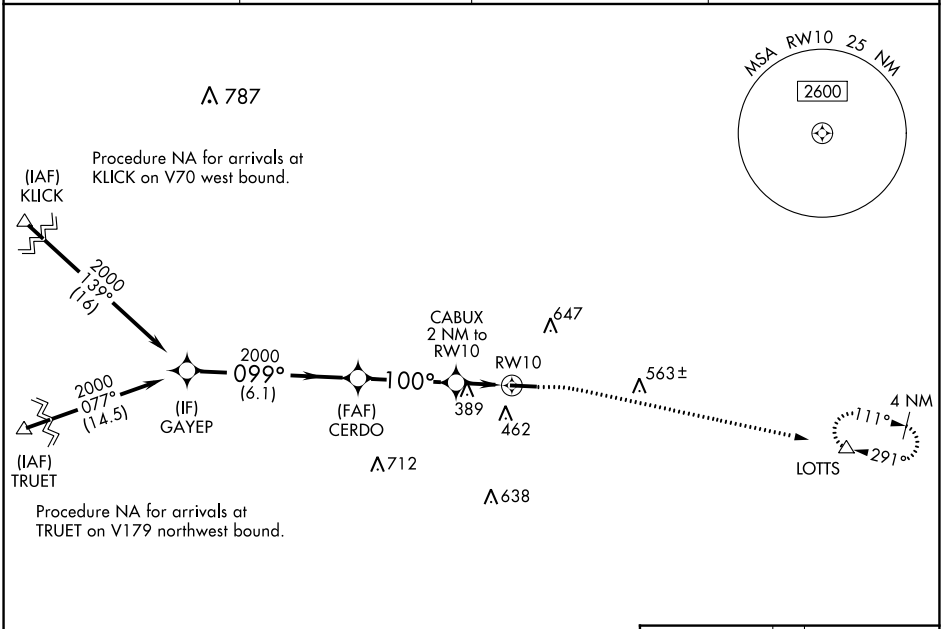

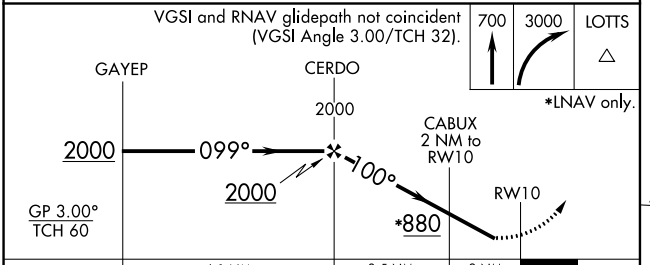



CATEGORY	A	B	C	D
LPV DA	537-1⅛ 340 (400-1⅛)			
LNAV/VNAV DA	494-1 297 (300-1)			
LNAV MDA	700-1 503 (600-1)		700-1⅜ 503 (600-1⅜)	
C CIRCLING	820-1 623 (700-1)	880-1 683 (700-1)	1060-2½ 863 (900-2½)	1060-2¾ 863 (900-2¾)

MIRL Rwy 10-28 L
REIL Rwy 10 L

SE-4, 28 NOV 2024 to 26 DEC 2024
SE-4, 28 NOV 2024 to 26 DEC 2024