

WAAS CH <b>69643</b> <b>W16A</b>	APP CRS <b>166°</b>	Rwy Idg TDZE Apt Elev	<b>7025</b> <b>6188</b> <b>6221</b>
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

# RNAV (GPS) RWY 16

AFTON MUNI (AFO)

RNP APCH - GPS.

**⚠** Rwy 16 helicopter visibility reduction below 3/4 SM NA. When Afton altimeter setting not received, procedure NA.

**⚠** MISSED APPROACH: (Do not exceed 210K until GIGSE) Climb to 7400 then climbing right turn to 13300 direct GIGSE and hold.  
 #Missed approach requires minimum climb of 420 feet per NM to 9000.  
 \*Missed approach requires minimum climb of 400 feet per NM to 9000.


AWOS-3P <b>119.025</b>	SALT LAKE CENTER <b>128.35 239.25</b>	UNICOM <b>122.8 (CTAF)</b>
---------------------------	------------------------------------------	-------------------------------



NW-1, 28 NOV 2024 to 26 DEC 2024

NW-1, 28 NOV 2024 to 26 DEC 2024

ELEV 6221	TDZE 6188
-----------	-----------

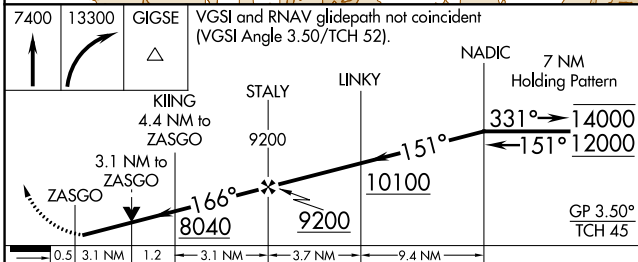

	KIING 4.4 NM to ZASGO	STALY 9200	LINKY	NADIC 7 NM Holding Pattern
	3.1 NM to ZASGO	166°	10100	331° → 14000 ← 151° 12000
	8040	9200		GP 3.50° TCH 45
	0.5	3.1 NM	1.2	3.1 NM
		3.7 NM		9.4 NM
CATEGORY	A	B	C	D
LPV DA*	6485-1 297 (300-1)			NA
LPV DA	7110-2½ 922 (900-2½)			NA
LNAV MDA#	7600-1¼ 1412 (1400-1¼)	7600-1½ 1412 (1400-1½)	7600-3 1412 (1400-3)	NA
LNAV MDA	7800-1¼ 1612 (1600-1¼)	7800-1½ 1612 (1600-1½)	7800-3 1612 (1600-3)	NA