

| | | |
|--|------------------------|---|
| WAAS CH 56535 W30A | APP CRS 301° | Rwy Idg 3802 TDZE 129 Apt Elev 166 |
|--|------------------------|---|


RNAV (GPS) RWY 30

ROY WILCOX (5R.1)



⚠ DME/DME RNP-0.3 NA. Procedure NA at night. Rwy 30 helicopter visibility reduction below 1 SM NA. Use Mobile Rgnl altimeter setting; when not received, use Hattiesburg Bobby L Chain Muni altimeter setting and increase all MDA 20 feet; increase LNAV Cat C visibility 1/8 SM.

⚠ NA MISSED APPROACH: Climb to 2000 direct JOVOK and hold.

| | | |
|----------------------------------|---|-------------------------------|
| MOB ASOS 124.75 257.85 | HOUSTON CENTER 127.65 285.475 | UNICOM 122.8 (CTAF) |
|----------------------------------|---|-------------------------------|

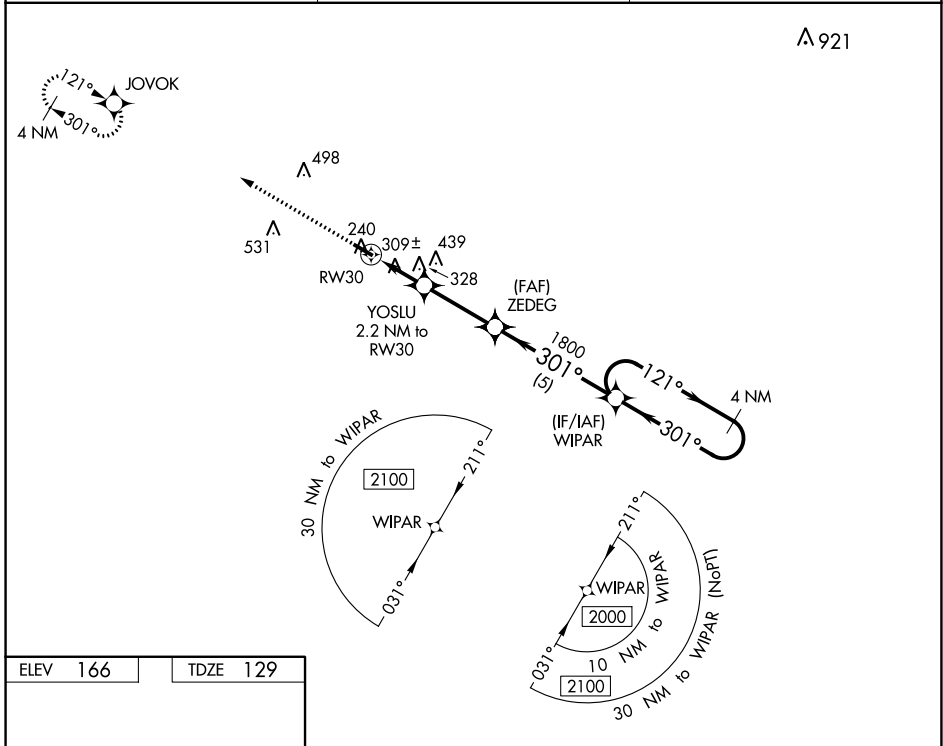

| | |
|----------|----------|
| ELEV 166 | TDZE 129 |
|----------|----------|

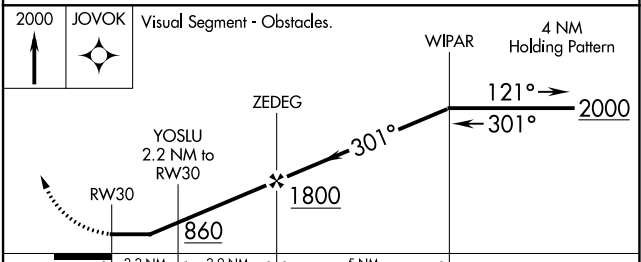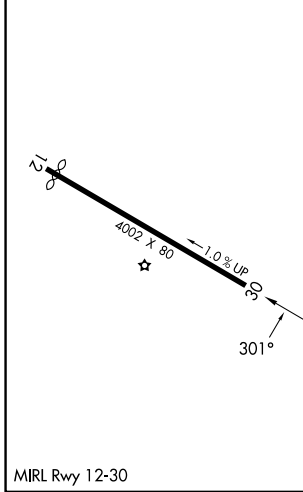

| CATEGORY | A | B | C | D |
|-------------------|----------------------|----------------------|------------------------------|----|
| LP MDA | 680-1 | 551 (600-1) | 680-1 5/8 551 (600-1 5/8) | NA |
| LNAV MDA | 700-1 | 571 (600-1) | 700-1 5/8 571 (600-1 5/8) | NA |
| C CIRCLING | 740-1 574 (600-1) | 760-1 594 (600-1) | 940-2 1/4 774 (800-2 1/4) | NA |