


Rwy	Knots	60	120	180	240	300	360
22	V/V(fpm)	975	1950	2925	3900	4875	5850

ATIS 284.5
 CLNC DEL
 294.7
 GND CON
 382.8
 KANEOHE TOWER
 120.7 (CTAF) 360.2
 KANEOHE APP/DEP CON
 125.0 263.5

Minimum Climb Rate to 3900

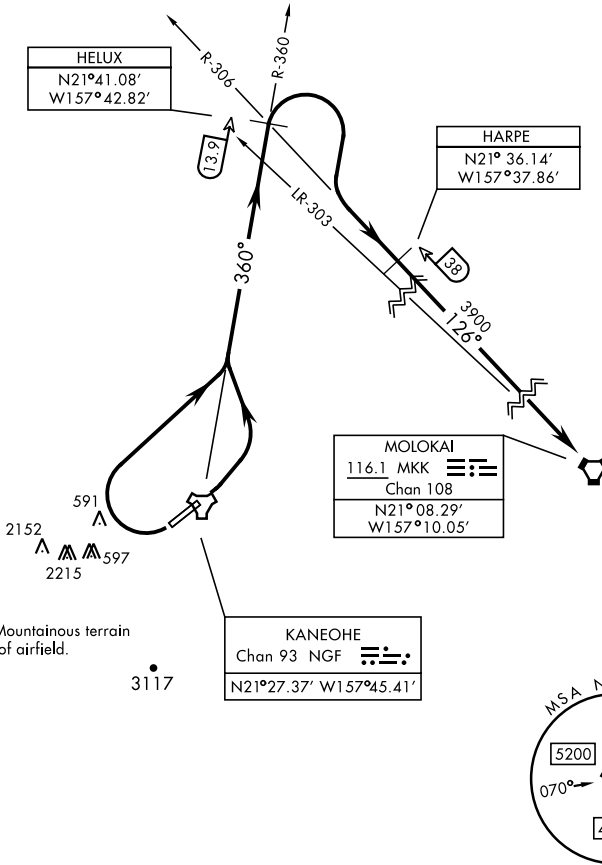

TA 18,000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 4: Turn left to intercept NGF TACAN R-360 to HELUX, then intercept MKK VORTAC R-306 to MKK.

TAKEOFF RWY 22: Turn right as soon as practicable to intercept NGF TACAN R-360 to HELUX, then intercept MKK VORTAC R-306 to MKK.