RNAV (GPS) RWY 9R

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

WAAS	APP CRS	Rwy Idg	9000
CH 97400	095°	TDZE	1026
W09B		Apt Elev	1026

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 8L or 8R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 direct RATCH and on track 092° to CONNI and hold.

D-ATIS	ATLANTA	ATLANTA TOWER					ALL	GND CON			ALL
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

CLNC DEL 118.1 CPDLC

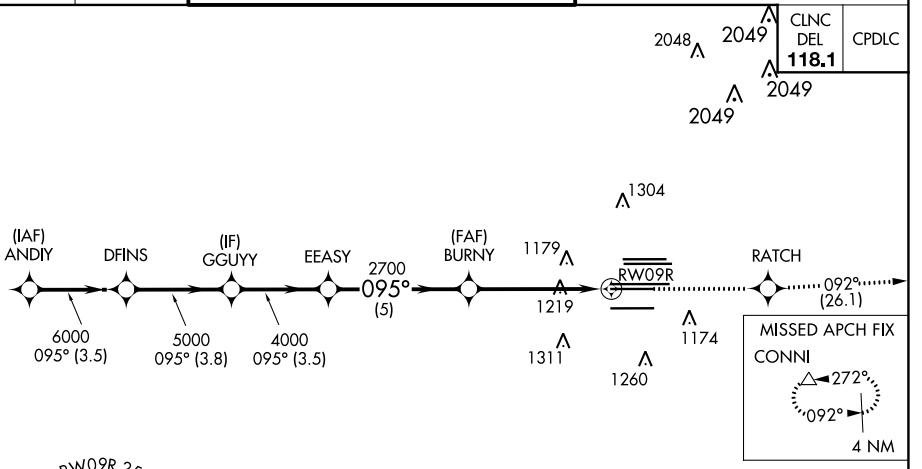



RADAR REQUIRED

ELEV 1026 D TDZE 1026

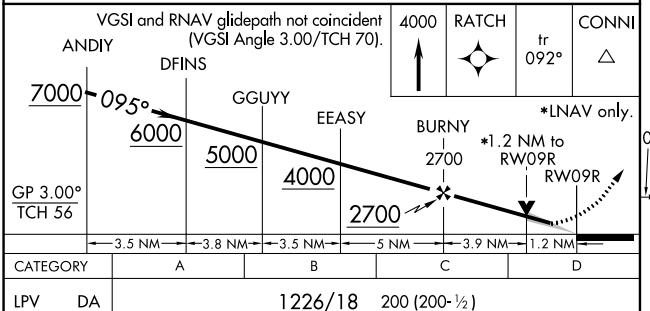

CATEGORY	A	B	C	D
LPV DA	1226/18 200 (200-½)			
LNAV/VNAV DA	1403/40 377 (500-¾)			
LNAV MDA	1480/24 454 (500-½)		1480/45 454 (500-⅞)	



HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 26 DEC 2024 to 23 JAN 2025
SE-4, 26 DEC 2024 to 23 JAN 2025