

WAAS CH <b>61299</b> <b>W28A</b>	APP CRS <b>275°</b>	Rwy Idg TDZE <b>998</b> Apt Elev <b>1026</b>	<b>9000</b>
--	------------------------	--	-------------

# RNAV (GPS) Y RWY 28

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


ALS-2




**MISSED APPROACH:**  
Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS ARR <b>119.65</b>	ATLANTA APP CON <b>127.9 379.9</b>	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS				ALL RWYS <b>119.1 125.325 123.85 119.3 119.5 254.4</b>	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28	ALL RWYS <b>121.9 121.75 121.65 254.4</b>
-----------------------------	--	---	--	--	--	--	--	---

CINC DEL <b>118.1</b>	CPDLC
-----------------------------	-------

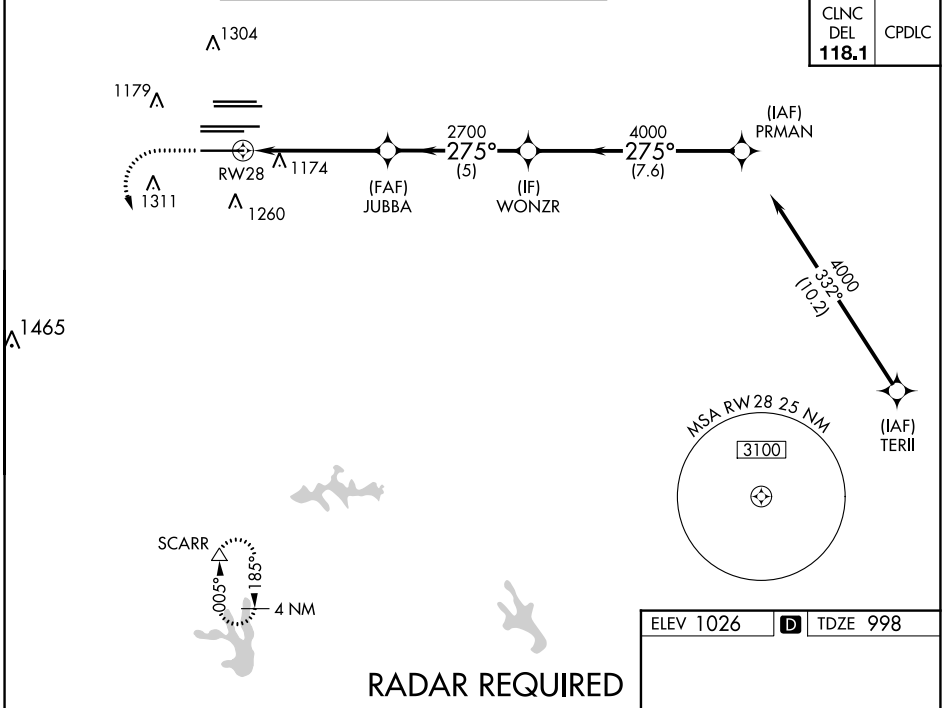

**RADAR REQUIRED**

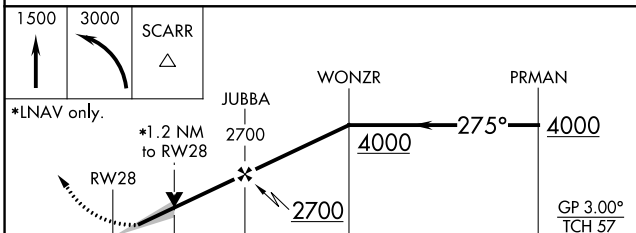

CATEGORY	A	B	C	D
LPV DA		1198/18	200 (200-½)	
LNAV/VNAV DA		1250/24	252 (300-½)	
LNAV MDA	1440/24	442 (500-½)	1440/45	442 (500-¾)

ELEV 1026 **D** TDZE 998

HIRL all Rwys  
TDZ/CL Rwys 8L, 9R, 10, 26R,  
27L and 28

SE-4, 26 DEC 2024 to 23 JAN 2025

SE-4, 26 DEC 2024 to 23 JAN 2025