

APP CRS <b>319°</b>	Rwy Idg <b>7822</b>
	TDZE <b>439</b>
	Apt Elev <b>459</b>

# RNAV (GPS) RWY 32L


SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP APCH-GPS.  
 For inop ALS, increase LNAV Cat C/D visibility to 1 3/8 mile.  
 ASR




MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct QODCU and hold.

ATIS ★ <b>128.7 256.7</b>	ST LOUIS APP CON <b>125.2 281.5</b>	SCOTT TOWER <b>128.25 253.5</b>	GND CON <b>119.2 275.8</b>	CLNC DEL <b>119.875 263.025</b>
------------------------------	--	------------------------------------	-------------------------------	------------------------------------

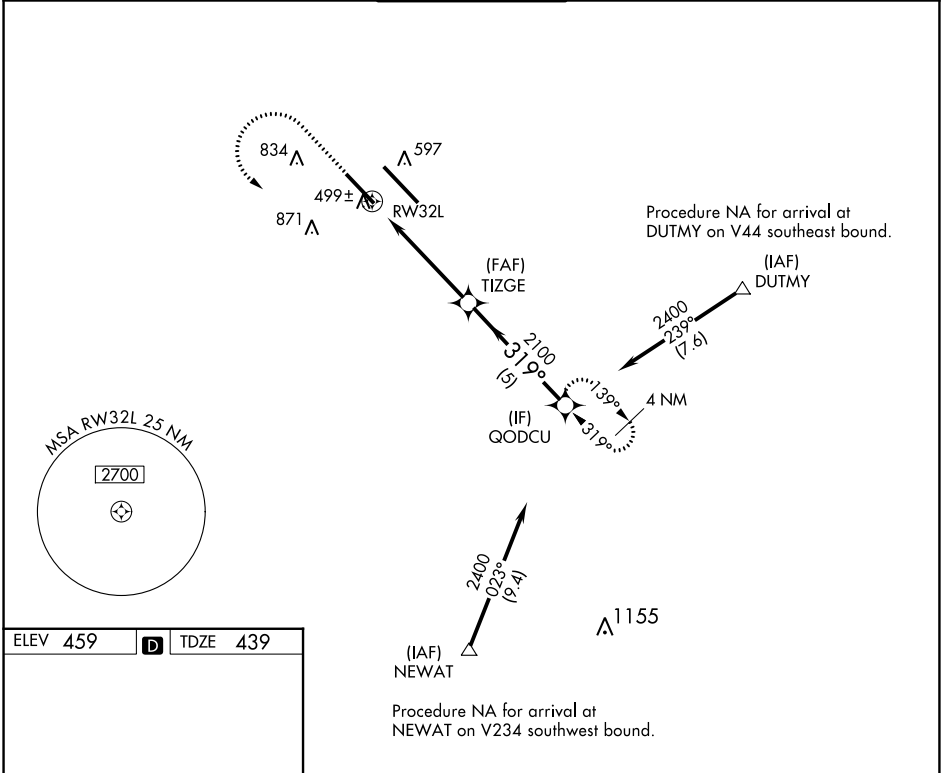

ELEV 459	<b>D</b>	TDZE 439
----------	----------	----------

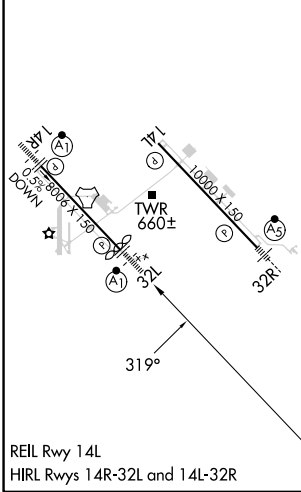

1500	2400	QODCU	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).
		QODCU	
		TIZGE	2400
		1.4 NM to RWY32L	2100
		3.03° TCH 55	
		1.4 NM	3.7 NM
		5 NM	
CATEGORY	A	B	C
LNAV MDA	920/24	481 (500-1/2)	920/50
	481 (500-1)		
<b>C</b> CIRCLING	1000-1	1120-1	1240-2 1/4
	541 (600-1)	661 (700-1)	781 (800-2 1/4)
			1240-2 1/2
			781 (800-2 1/2)

EC-3, 26 DEC 2024 to 23 JAN 2025

EC-3, 26 DEC 2024 to 23 JAN 2025