RNAV (GPS) RWY 18

ARKANSAS INTL (BYH)

WAAS	APP CRS	Rwy Idg	11602
CH 58306	181°	TDZE	250
W18A		Apt Elev	254

▼ NA

Inop table does not apply. Baro-VNAV NA when using Blytheville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA.
Obtain local altimeter setting on CTAF; when not received, use Blytheville Muni altimeter setting and increase all DA 14 feet and all MDA 20 feet.
Increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ mile.

MISSED APPROACH: Climb to 2500 direct HABSI and hold.

MEMPHIS CENTER	UNICOM
134.65 316.15	122.7 (CTAF) L





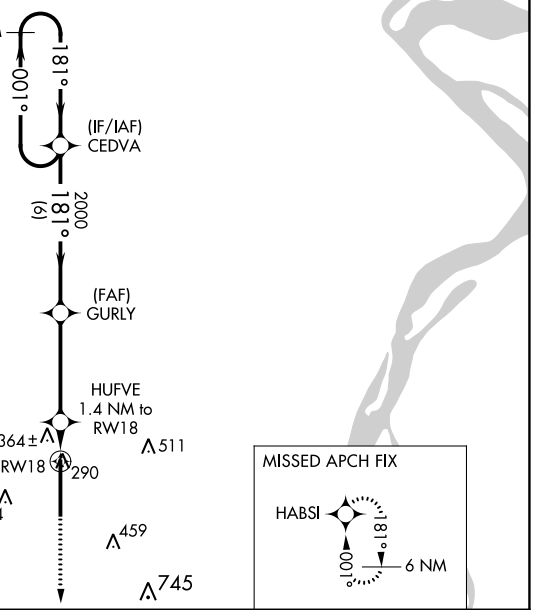

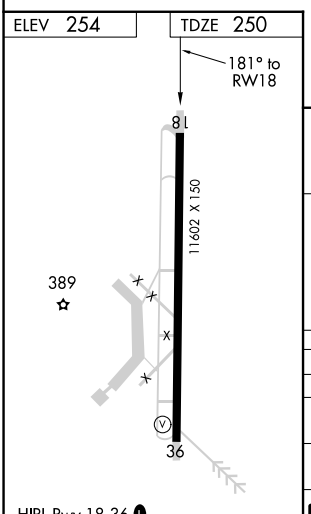

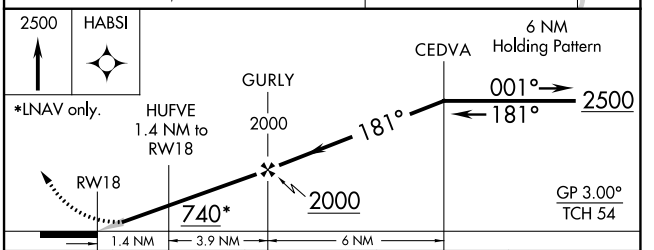

CATEGORY	A	B	C	D
LPV DA	450-¾		200 (200-¾)	
LNAV/VNAV DA	545-1		295 (300-1)	
LNAV MDA	620-1		370 (400-1)	
C CIRCLING	700-1 446 (500-1)	720-1 466 (500-1)	800-1½ 546 (600-1½)	820-2 566 (600-2)

SC-1, 26 DEC 2024 to 23 JAN 2025
SC-1, 26 DEC 2024 to 23 JAN 2025