

LOC I-CHS 109.7	APP CRS 154°	Rwy Idg TDZE Apt Elev	9001 43 46
---------------------------	------------------------	-----------------------------	---------------------------------------

ILS or LOC RWY 15

CHARLESTON AFB/INTL (CHS)



DME required.

▲ For inop ALS, increase S-ILS 15 Cat E visibility to RVR 4000 and S-LOC 15 Cats C/D/E visibility to RVR 5500. DME from CHS VORTAC. Simultaneous reception of I-CHS and CHS DME required.



ALS F-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3500 on CHS VORTAC R-055 to WANDO/CHS VORTAC 13 DME and hold, continue climb-in-hold to 3500.

D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC
-------------------------	--	--	-------------------------------	-----------------------------------	-------

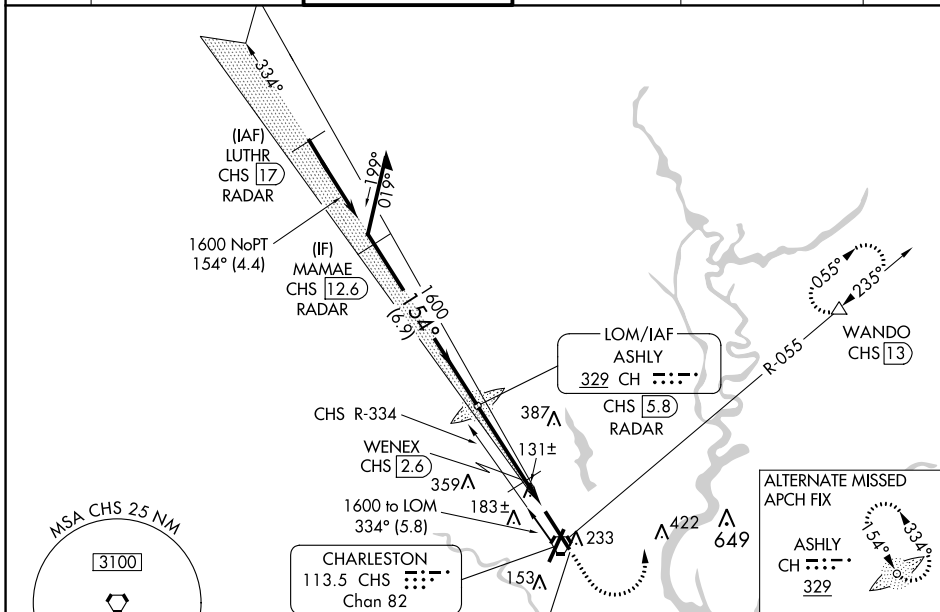

ELEV 46	TDZE 43
154°	TDZ/CL Rwy 15
	REIL Rwys 3 and 21
	HIRL Rwys 3-21 and 15-33

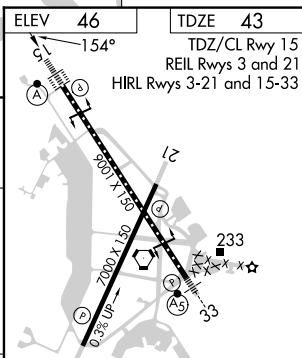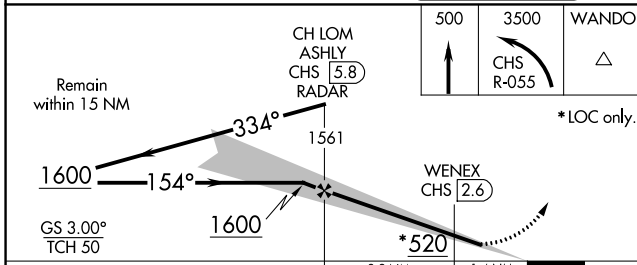

CATEGORY	A	B	C	D	E	FAF to MAP 4.6 NM					
S-ILS 15	243/18		200 (200-½)			Knots	60	90	120	150	180
S-LOC 15	400/24	357 (400-½)	400/30		357 (400-¾)	Min:Seq	4:36	3:04	2:18	1:50	1:32
CIRCLING	540-1	494 (500-1)	540-1½	740-2¼	740-2½						

SE-2, 26 DEC 2024 to 23 JAN 2025

SE-2, 26 DEC 2024 to 23 JAN 2025