



WAAS CH 63218 W33A	APP CRS 334°	Rwy Idg TDZE Apt Elev	9001 45 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 33

CHARLESTON AFB/INTL (CHS)

RNP APCH.	MALSR 	MISSED APPROACH: Climb to 3000 direct MAMAE and hold, continue to climb-in-hold to 3000.
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. # RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		

D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC
-------------------------	--	--	-------------------------------	-----------------------------------	-------

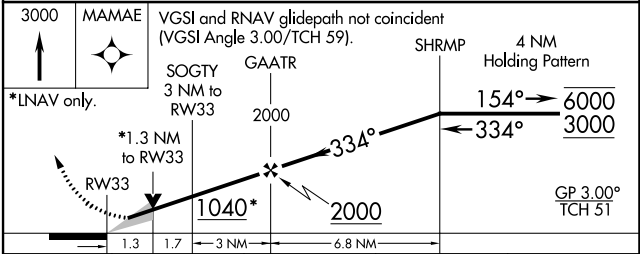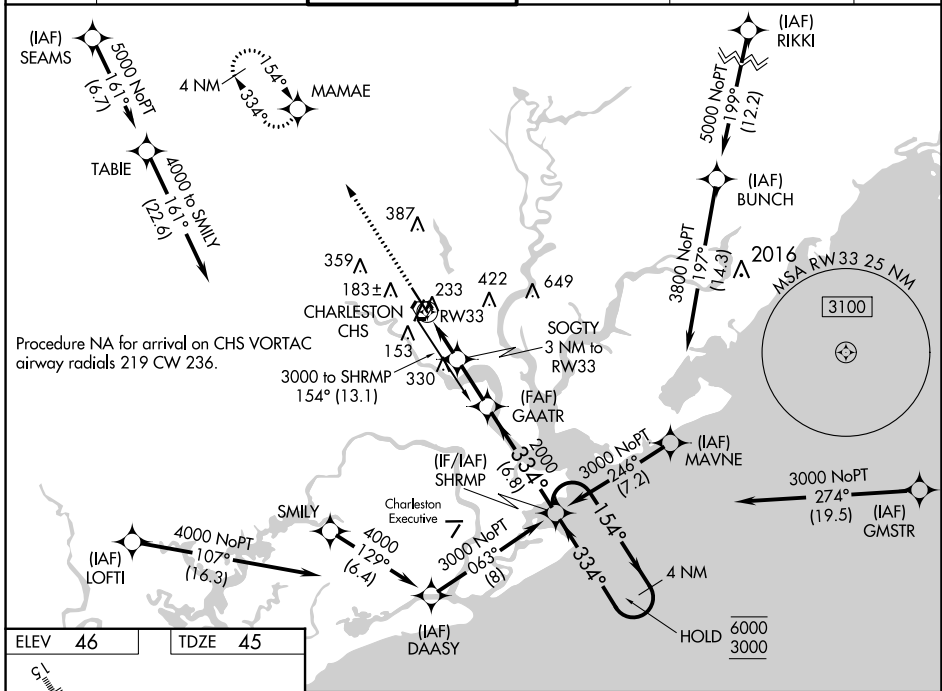

CATEGORY	A	B	C	D
LPV DA #		245/24	200 (200-½)	
LNAV/VNAV DA		472/40	427 (500-¾)	
LNAV MDA	500/24	455 (500-½)	500/45	455 (500-¾)
<input checked="" type="checkbox"/> CIRCLING	540-1	494 (500-1)	540-1½ 494 (500-1½)	740-2¼ 694 (700-2¼)