


VORTAC CHS	APP CRS	Rwy Idg	9001
113.5	157°	TDZE	43
Chan 82		Apt Elev	46



VOR Y or TACAN Y RWY 15
CHARLESTON AFB/INTL (CHS)

DME required.		ALSF-2	MISSED APPROACH: Climb to 500 then climbing left turn to 3500 on CHS VORTAC R-055 to WANDO/CHS 13 DME and hold, continue climb-in-hold to 3500.		
For inop ALS, increase S-15 Cat A/B visibility to RVR 5500 and Cat C/D visibility to RVR 6000.					
D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

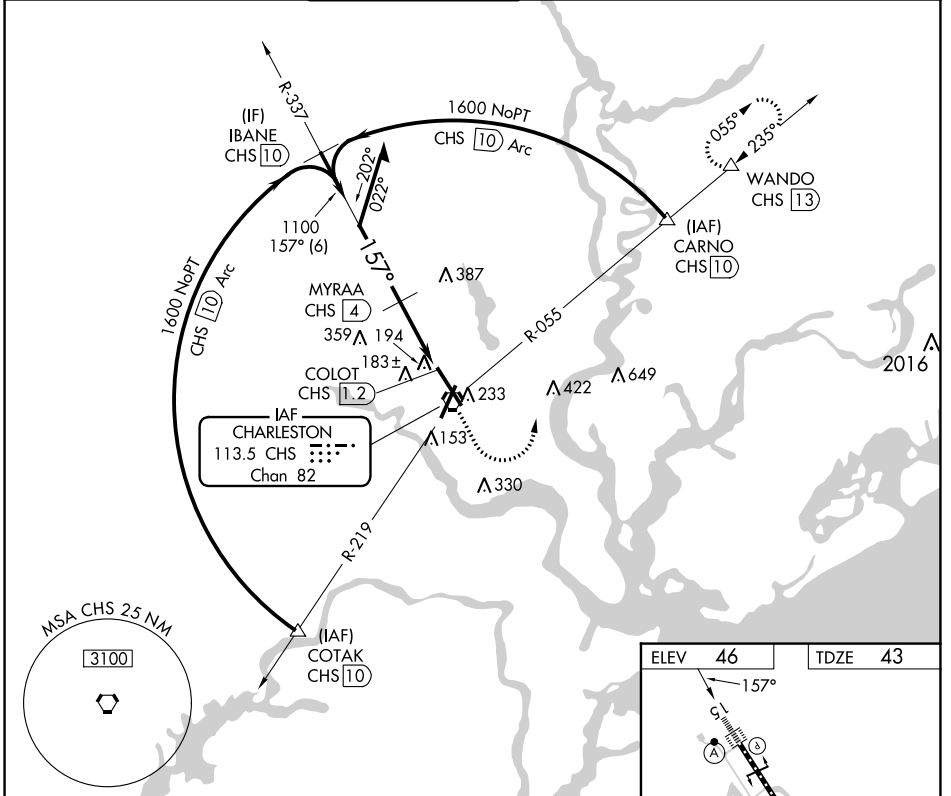

SE-2, 26 DEC 2024 to 23 JAN 2025

SE-2, 26 DEC 2024 to 23 JAN 2025

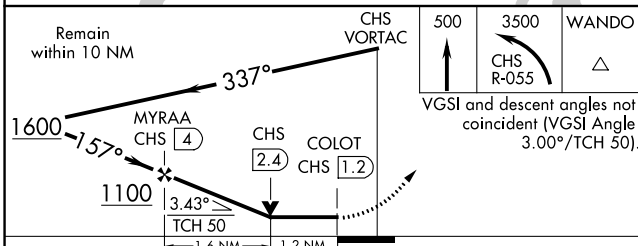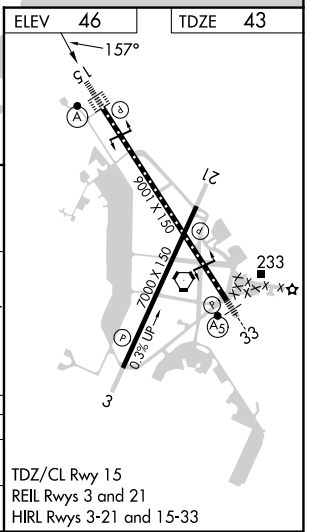

CATEGORY	A	B	C	D
S-15	460/24	417 (500-1/2)	460/40	417 (500-3/4)
CIRCLING	540-1	494 (500-1)	540-1 1/2 494 (500-1 1/2)	740-2 1/4 694 (700-2 1/4)

TDZ/CL Rwy 15
REIL Rwys 3 and 21
HIRL Rwys 3-21 and 15-33