RNAV (GPS) Y RWY 36R

CHARLOTTE/DOUGLAS INTL (CLT)

WAAS	APP CRS	Rwy Idg	8390
CH 90100	003°	TDZE	727
W36D		Apt Elev	748

RNP APCH.

Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALSF, increase LNAV/VNAV all Cats visibility to 1⅝ mile.

ALSF-2

MISSED APPROACH: Climb to1320 then climbing right turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER			GND CON		CLNC DEL
ARR 121.15	(001°-119°)	128.32	(Rwys 18L-36R)	118.1	257.8	121.8	348.6 (WEST)	127.15
DEP 132.1	(120°-295°)	120.05	(Rwy 18C-36C)	126.4	257.8	121.9	348.6 (EAST)	348.6
	(296°-360°)	134.75	(Rwy 18R-36L)	133.35	257.8			
	(180°-359°)	257.2						
	(360°-179°)	307.8						

CPDLC

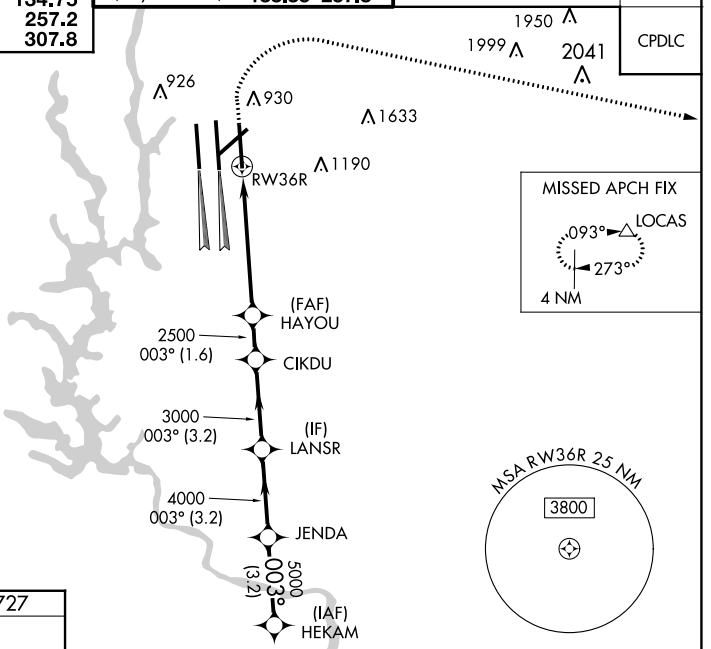

ELEV 748 | D | TDZE 727

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

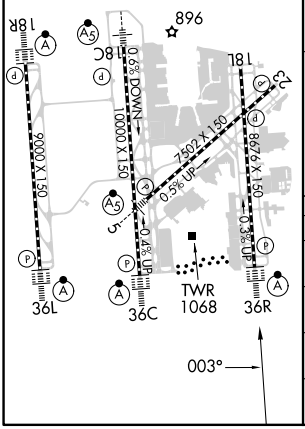

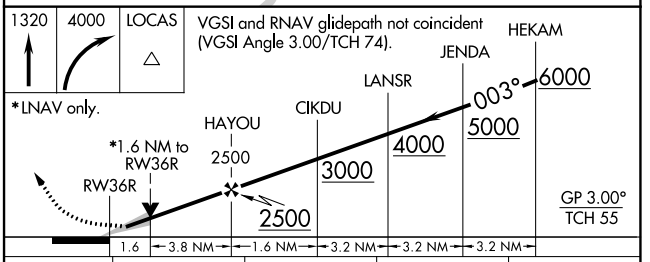

CATEGORY	A	B	C	D
LPV DA	927/18 200 (200-½)			
LNAV/VNAV DA	1229-1¼ 502 (500-1¼)			
LNAV MDA	1320/24 593 (600-½)		1320-1¼ 593 (600-1¼)	
C CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

SE-2, 26 DEC 2024 to 23 JAN 2025
SE-2, 26 DEC 2024 to 23 JAN 2025