LOC/DME I-AHI	APP CRS	Rwy Idg 13500
109.1	352°	TDZE 6118
Chan 28		Apt Elev 6187

ILS or LOC RWY 35R

CITY OF COLORADO SPRINGS MUNI (COS)

RADAR required when R-2601 in use.

MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and on BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON	CLNC DEL
125.0 254.3	124.0 257.875	119.9 360.6	121.7 348.6	134.45 363.125

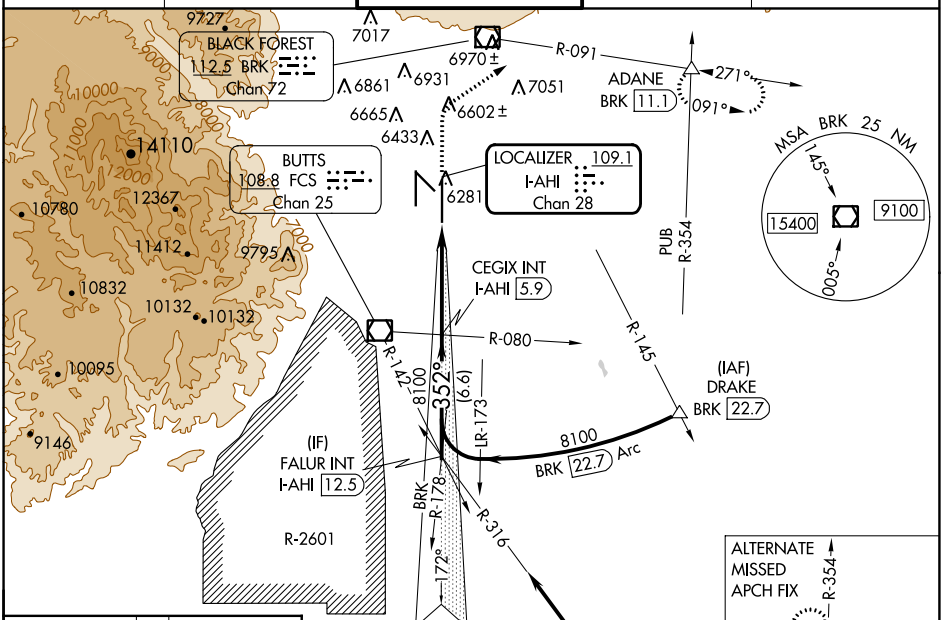

ELEV 6187 | D | TDZE 6118

MIRL Rwy 13-31
HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZ/CL Rwys 17L and 35R

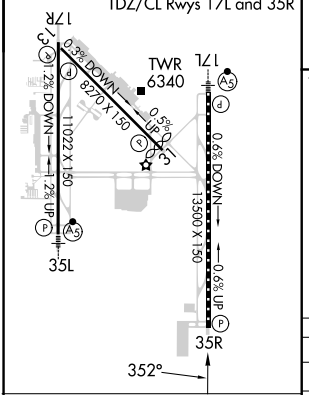

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

6700	9000	BRK	ADANE
↑	hdg 047°	R-091	△

FALUR INT I-AHI 12.5 | CEGIX INT I-AHI 5.9

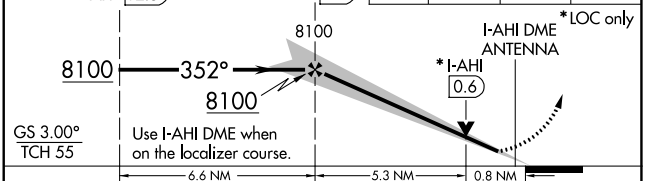

CATEGORY	A	B	C	D
S-ILS 35R	6318/40		200 (200-¾)	
S-LOC 35R	6420/55	302 (300-1)	6420/45	302 (300-⅞)
C CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

SW-1, 26 DEC 2024 to 23 JAN 2025
SW-1, 26 DEC 2024 to 23 JAN 2025