


| | | | |
|--|------------------------|---|--------------|
| WAAS CH 49112 W35A | APP CRS 352° | Rwy Idg TDZE 6075 Apt Elev 6187 | 11022 |
|--|------------------------|---|--------------|

RNAV (GPS) Y RWY 35L


CITY OF COLORADO SPRINGS MUNI (COS)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR increase LNAV Cat C and D visibility to RVR 5500. RADAR monitoring required when R-2601 in use. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR 



MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 direct ADANE and hold.

| | | | | |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|
| ATIS 125.0 254.3 | SPRINGS APP CON 124.0 257.875 | SPRINGS TOWER 119.9 360.6 | GND CON 121.7 348.6 | CLNC DEL 134.45 363.125 |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|

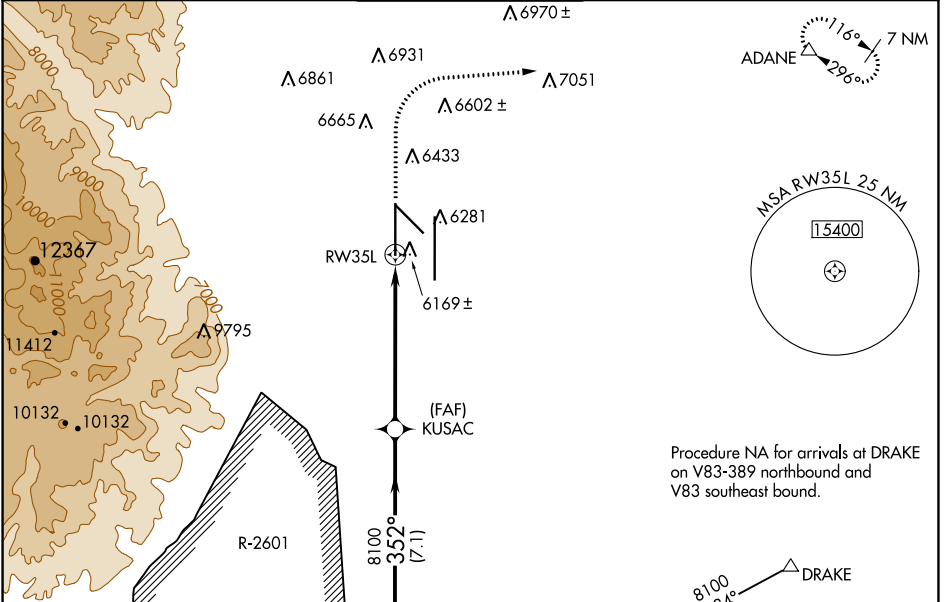

| | | |
|------------------|----------|------------------|
| ELEV 6187 | D | TDZE 6075 |
|------------------|----------|------------------|

MIRL Rwy 13-31
HIRL Rwy 17R-35L and 17L-35R
REIL Rwy 13, 17R, 31 and 35R
TDZ/CL Rwy 17L and 35R

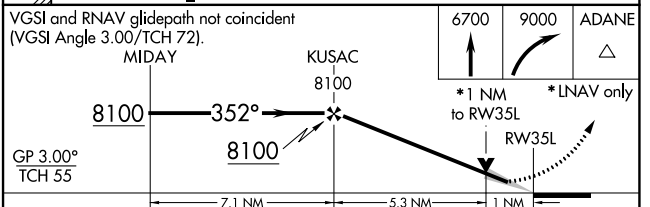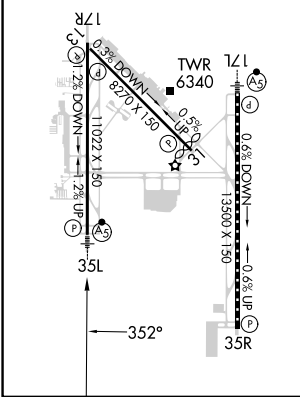

| CATEGORY | A | B | C | D |
|--|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA # | | 6275/24 | 200 (100-½) | |
| LNAV/VNAV DA | | 6380/30 | 305 (200-⅝) | |
| LNAV MDA | 6440/24 | 365 (300-½) | 6440/35 | 365 (300-⅝) |
| <input checked="" type="checkbox"/> CIRCLING | 6740-1 553 (600-1) | 6800-1 613 (700-1) | 7040-2½ 853 (900-2½) | 7260-3 1073 (1100-3) |

SW-1, 26 DEC 2024 to 23 JAN 2025

SW-1, 26 DEC 2024 to 23 JAN 2025