

WAAS CH <b>53412</b> <b>W34A</b>	APP CRS <b>344°</b>	Rwy ldg <b>7455</b> TDZE <b>680</b> Apt Elev <b>710</b>
--	------------------------	---



# RNAV (GPS) RWY 34

FORT WORTH MEACHAM INTL (FTW)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV Cat D and LNAV Cat D visibility to 1½ mile.

MALS MISSED APPROACH: Climb to 3000 direct WOROD and hold.

ATIS <b>120.7</b>	LONE STAR APP CON (North) <b>118.1 306.95</b> (South) <b>135.975 379.9</b>	MEACHAM TOWER <b>118.3 257.8</b>	GND CON <b>121.9</b>	CLNC DEL <b>124.65</b>
----------------------	--	-------------------------------------	-------------------------	---------------------------

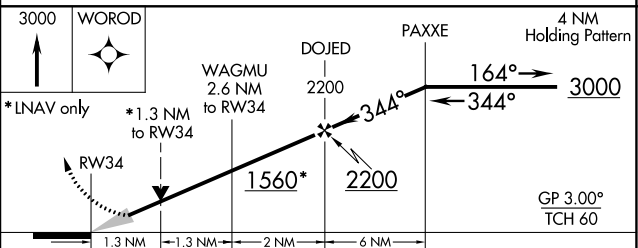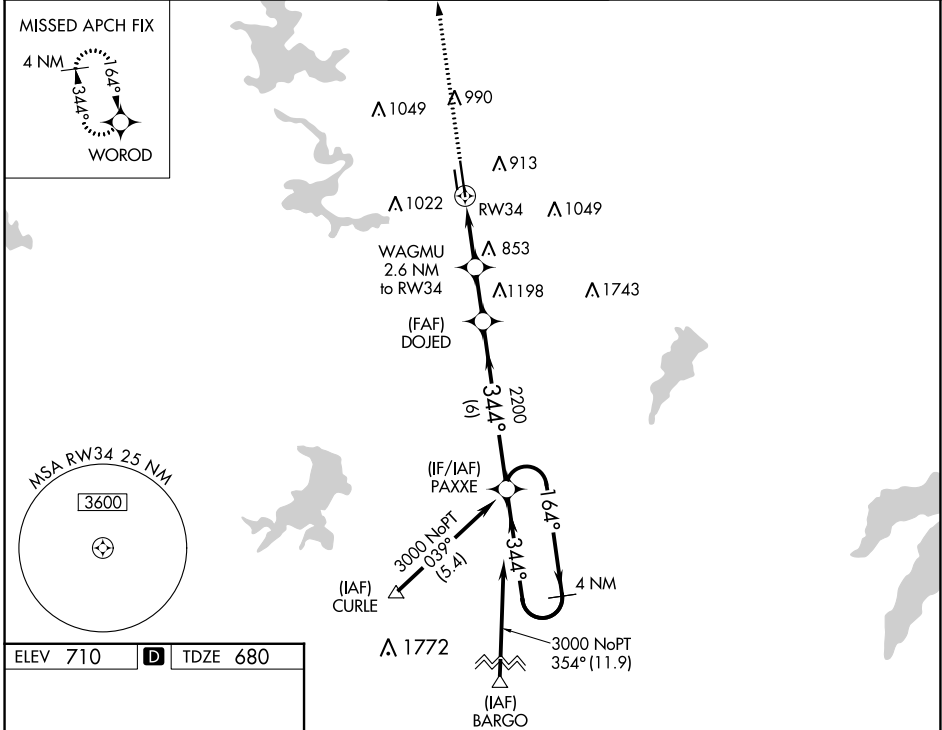

CATEGORY	A	B	C	D
LPV DA		880-¾	200 (200-¾)	
LNAV/VNAV DA		1091-1½	411 (400-1½)	
LNAV MDA	1160-¾	480 (500-¾)	1160-1½	480 (500-1½)
<b>C</b> CIRCLING	1260-1 550 (600-1)	1280-1 570 (600-1)	1340-1¾ 630 (700-1¾)	1500-2½ 790 (800-2½)