RNAV (GPS) RWY 14

ST PAUL DOWNTOWN HOLMAN FLD (STP)

WAAS	APP CRS	Rwy Idg	6148
CH 62828	146°	TDZE	705
W14A		Apt Elev	705

T A -30°C — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Rwy 14 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV Cats C and D to 2½ SM.

MALSR

MISSED APPROACH: (Do not exceed 250K until WHISK) Climb to 1700 then climbing left turn to 3000 direct WHISK and hold.

ATIS	MINNEAPOLIS APP CON	ST. PAUL TOWER ★	GND CON	CLNC DEL	UNICOM
118.35	121.2 335.65	119.1(CTAF) L 257.8	121.675	121.675	122.95

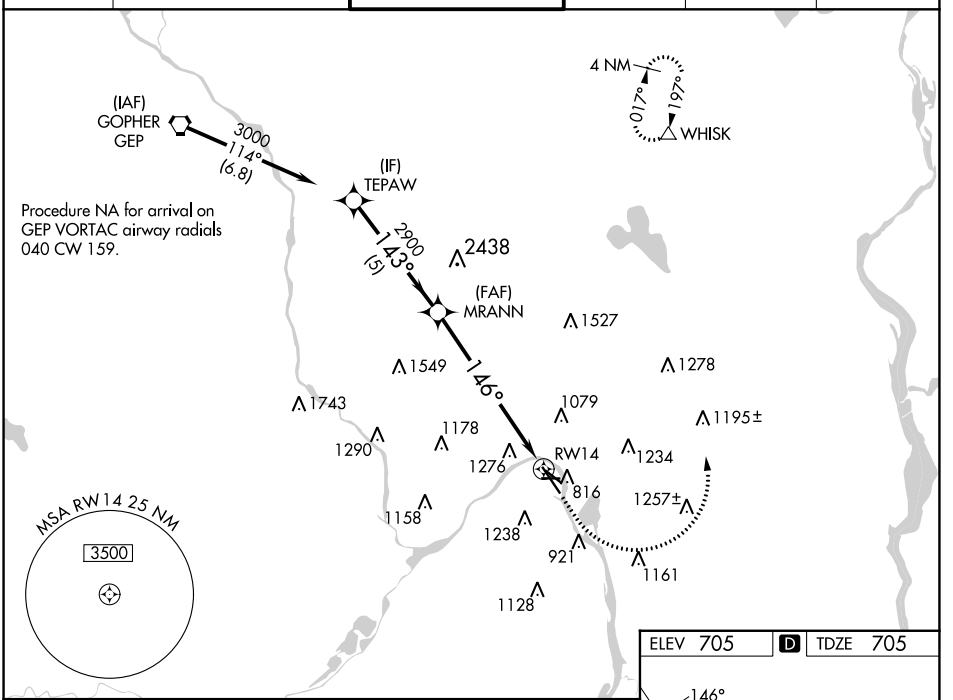

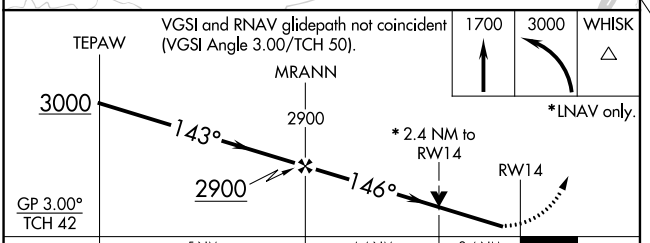

CATEGORY	A	B	C	D
LPV DA	955/40 250 (300-¾)			
LNAV/VNAV DA	1511-2½ 806 (900-2½)			
LNAV MDA	1520/40 815 (900-¾)		1520-1⅞ 815 (900-1⅞)	
C CIRCLING	1580-1¼ 875 (900-1¼)		1580-2½ 875 (900-2½)	1580-2¾ 875 (900-2¾)

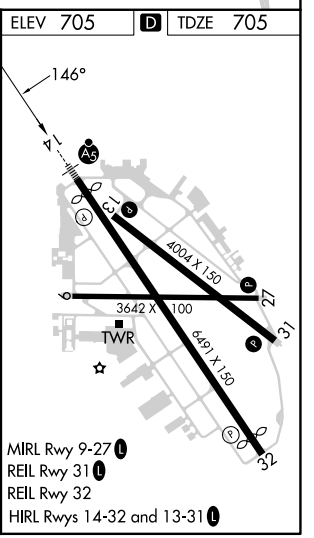

NC-1, 26 DEC 2024 to 23 JAN 2025
NC-1, 26 DEC 2024 to 23 JAN 2025