


LOC/DME I-MRY 110.7 Chan 44	APP CRS 098°	Rwy ldg 7000 TDZE 198 Apt Elev 257
---	------------------------	---

ILS or LOC RWY 10R

MONTEREY RGNL (MRY)


DME required.

▼ Circling NA south of Rwy 10R-28L.
▲ For inop ALS, increase S-ILS 10R all Cats visibility to RVR 6000, and increase S-LOC 10R Cat C and D visibility to 2 SM.

MALSRL


MISSED APPROACH: Climb to 600 then climbing left turn to 5000 on heading 030° and on SNS VORTAC R-243 to SNS VORTAC and hold, continue climb-in-hold to 5000.
Missed approach requires minimum climb of 265 feet per NM to 1360.


ATIS 119.25	NORCAL APP CON 133.0 251.15 (001°-135°) 127.15 307.125 (136°-360°)	MONTEREY TOWER * 118.4 (CTAF) 257.8	GND CON 120.875 348.6	CLNC DEL 135.45	UNICOM 122.95
-----------------------	--	--	---------------------------------	---------------------------	-------------------------

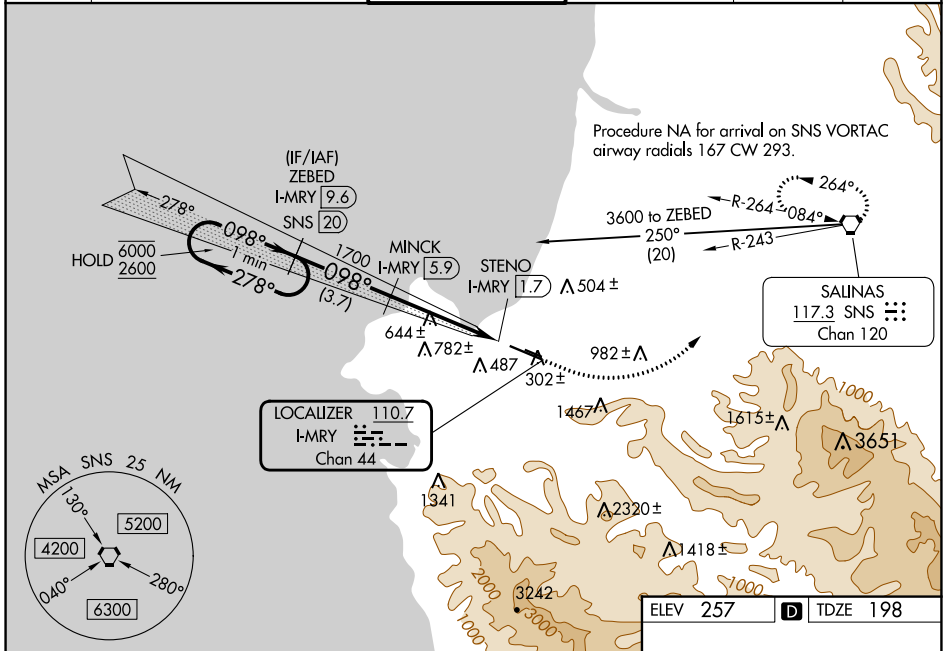

SW-2, 26 DEC 2024 to 23 JAN 2025

SW-2, 26 DEC 2024 to 23 JAN 2025

ILS unusable from 1.7 DME inbound.	One Minute Holding Pattern	ZEBED I-MRY 9.6	MINCK I-MRY 5.9	600	5000	SNS R-243	SNS
------------------------------------	----------------------------	-----------------	-----------------	-----	------	-----------	-----

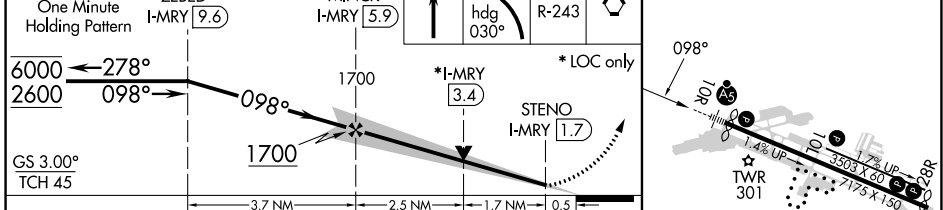

CATEGORY	A	B	C	D
S-ILS 10R#	398/24		200 (200-½)	
S-ILS 10R	583/35		385 (400-⅝)	
S-LOC 10R	920/24	722 (700-½)	920-1⅝	722 (700-1⅝)
C CIRCLING	920-1	663 (700-1)	1280-3	NA
			1023 (1100-3)	

MIRL Rwy 10L-28R
HIRL Rwy 10R-28L
REIL Rwy 28L
REIL Rwy 10L and 28R