


LOC/DME I-SNA <b>111.75</b> Chan 54(Y)	APP CRS <b>016°</b>	Rwy Idg TDZE Apt Elev	<b>5700</b> <b>56</b> <b>56</b>
--	------------------------	-----------------------------	---------------------------------------

**LOC BC RWY 2L**  
JOHN WAYNE/ORANGE COUNTY (SNA)

<b>⚠</b> Circling Rwy 20L NA at night.	MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold.
--	---



D-ATIS <b>126.0</b>	SOCAL APP CON <b>121.3 263.1</b>	JOHN WAYNE TOWER * <b>126.8</b> (CTAF) <b>343.625</b>	GND CON <b>120.8</b>	CLNC DEL <b>118.0</b>	CPDLC	UNICOM <b>122.95</b>
------------------------	-------------------------------------	--	-------------------------	--------------------------	-------	-------------------------

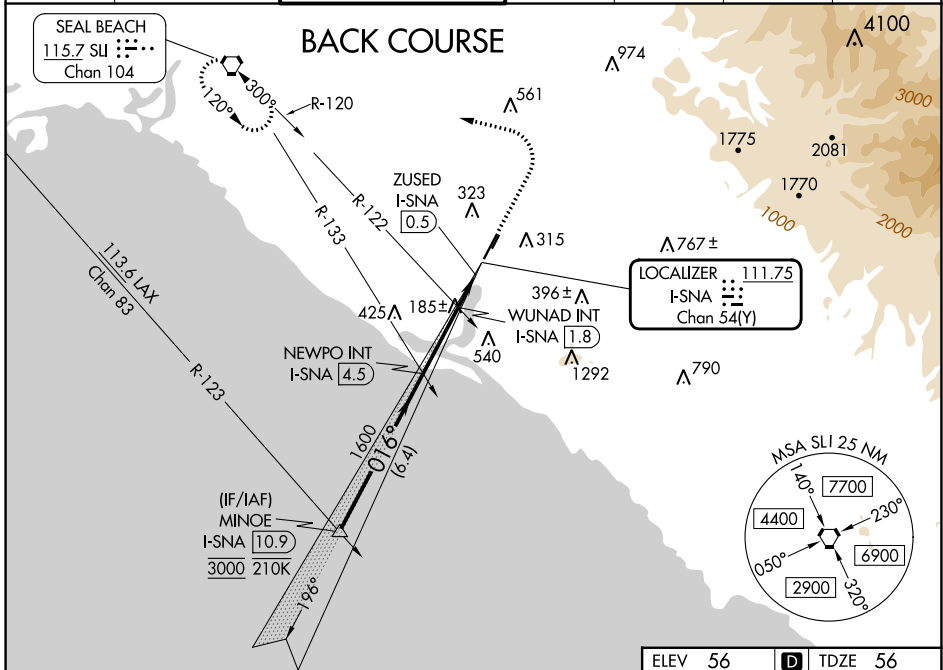

SW-3, 26 DEC 2024 to 23 JAN 2025

SW-3, 26 DEC 2024 to 23 JAN 2025

ELEV 56	<b>D</b> TDZE 56
---------	------------------

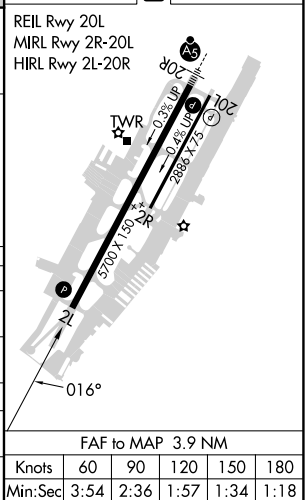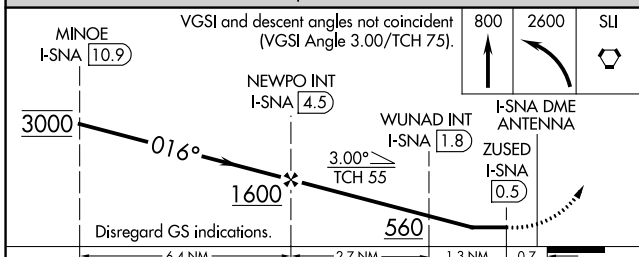

CATEGORY	A	B	C	D
S-LOC 2L	560-1	504 (600-1)	560-1 3/8	504 (600-1 3/8)
<b>C</b> CIRCLING	640-1	584 (600-1)	840-2 1/4 784 (800-2 1/4)	1180-3 1124 (1200-3)
WUNAD FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 2L	480-1	424 (500-1)	480-1 1/4	424 (500-1 1/4)
<b>C</b> CIRCLING	640-1	584 (600-1)	840-2 1/4 784 (800-2 1/4)	1180-3 1124 (1200-3)

FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18