

LOC/DME I-SMX <b>108.9</b> Chan 26	APP CRS <b>120°</b>	Rwy Idg <b>8004</b> TDZE <b>230</b> Apt Elev <b>261</b>
------------------------------------------	------------------------	---------------------------------------------------------------

# ILS or LOC RWY 12


SANTA MARIA PUB/CAPT G ALLAN HANCOCK FLD (SMX)

**⚠** Night Landing: Rwy 2 NA. VDP NA when using San Luis Obispo altimeter setting. When local altimeter setting not received, use San Luis Obispo altimeter setting and increase DA to 489 feet; increase all MDA 60 feet and S-LOC visibility Cat C and D to RVR 5500. For inop MALS, increase S-LOC 12 Cat C/D visibility to 1½ mile.  
# RVR 1800 authorized with use of FD or AP or HUD to DA; NA when using San Luis Obispo altimeter setting.

**MALS**  
AS

**MISSED APPROACH:**  
Climb to 800, then climbing left turn to 5000 direct MQO VORTAC and hold.


ATIS <b>121.15</b>	SANTA BARBARA APP CON* <b>124.15 327.8</b>	SANTA MARIA TOWER* <b>118.3 (CTAF) 239.25</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
-----------------------	-----------------------------------------------	--------------------------------------------------	-------------------------	-------------------------

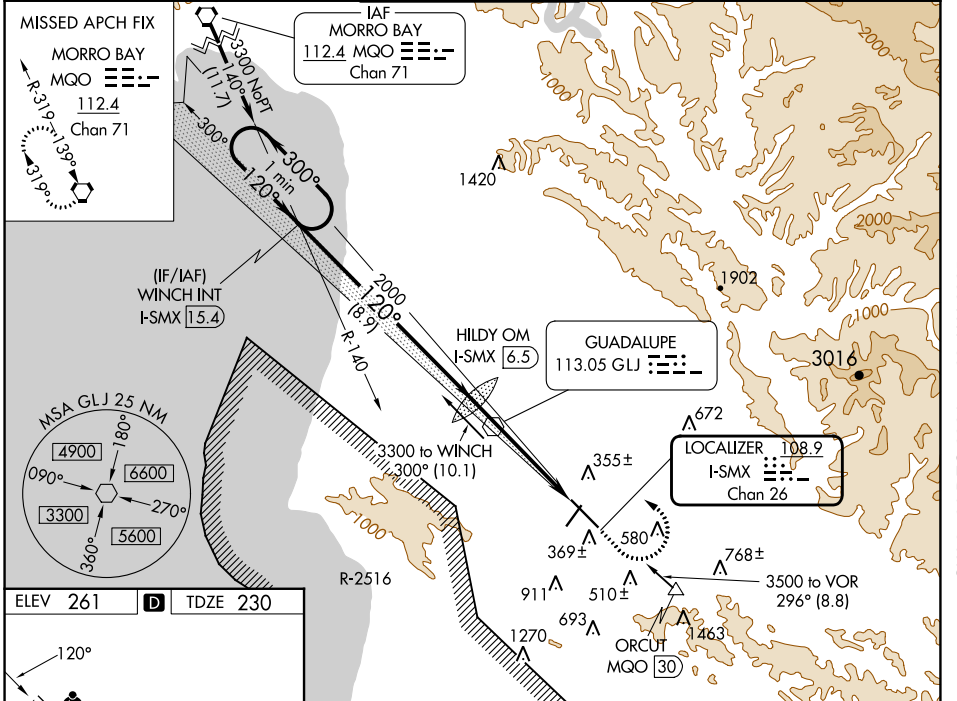

ELEV 261	<b>D</b>	TDZE 230
----------	----------	----------

HIRL Rwy 12-30

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

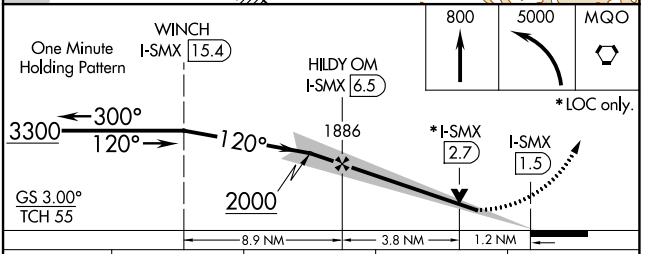

CATEGORY	A	B	C	D
S-ILS 12#	430/24 200 (200-½)			
S-LOC 12	680/24	450 (500-½)	680/50	450 (500-1)
CIRCLING	860-1 599 (600-1)	1000-1 739 (800-1)	1420-3 1159 (1200-3)	1520-3 1259 (1300-3)

SW-3, 26 DEC 2024 to 23 JAN 2025

SW-3, 26 DEC 2024 to 23 JAN 2025