

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 69420 W32A | APP CRS 322° | Rwy Idg TDZE Apt Elev | 5103 516 516 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 32

WACO RGNL (ACT)



⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received use Mc Gregor Exec altimeter setting and increase all DA 31 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 54°C (130°F). Baro-VNAV NA when using Mc Gregor Exec altimeter setting. VDP NA with Mc Gregor Exec altimeter setting.

MISSED APPROACH:
Climb to 4000 direct EVVIS and hold, continue climb-in-hold to 4000.

| | | | | |
|-----------------------|---|--|-------------------------|-------------------------|
| ATIS 123.85 | WACO APP CON * 127.65 227.125 | WACO TOWER * 119.3(CTAF) 0 257.8 | GND CON 121.9 | UNICOM 122.95 |
|-----------------------|---|--|-------------------------|-------------------------|

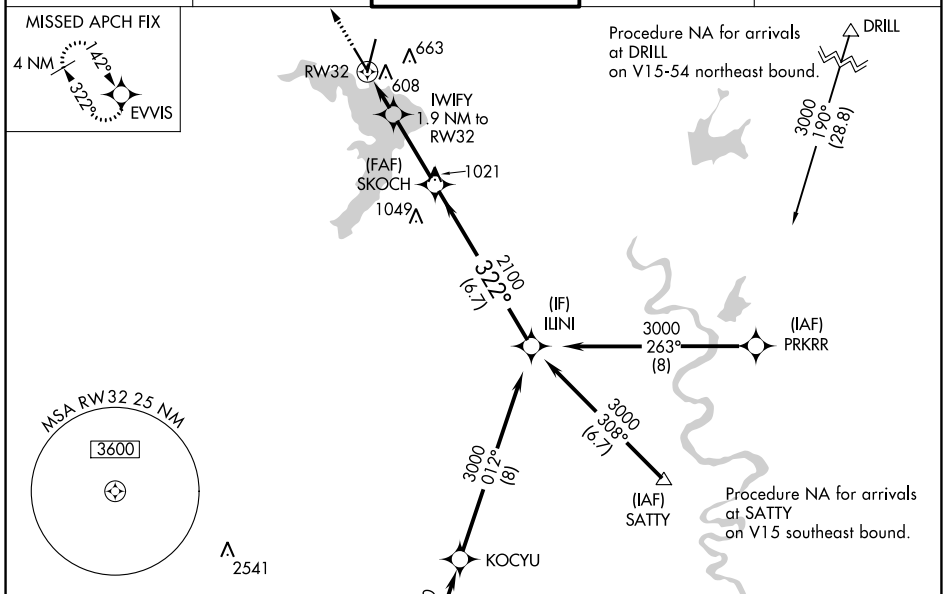

| | | |
|----------|----------|----------|
| ELEV 516 | D | TDZE 516 |
|----------|----------|----------|

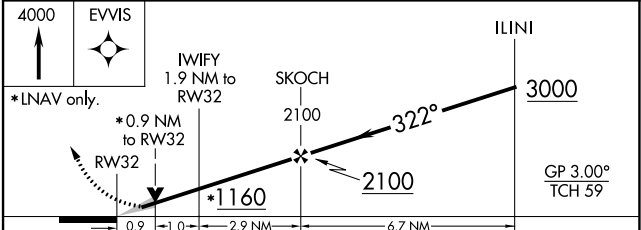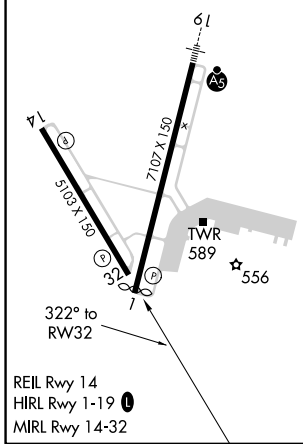

| CATEGORY | A | B | C | D |
|-------------------|----------------------|----------------------|-------------------------------|-----------------------|
| LPV DA | | 766-3/4 | 250 (300-3/4) | |
| LNAV/VNAV DA | | 773-3/4 | 257 (300-3/4) | |
| LNAV MDA | | 860-1 | 344 (400-1) | |
| C CIRCLING | 940-1 424 (500-1) | 980-1 464 (500-1) | 1020-1 1/2 504 (600-1 1/2) | 1160-2 644 (700-2) |

SC-3, 26 DEC 2024 to 23 JAN 2025

SC-3, 26 DEC 2024 to 23 JAN 2025