RNAV (GPS) RWY 7

FOUR CORNERS RGNL (FMN)

WAAS CH 90110 W07A	APP CRS 076°	Rwy Idg 6248 / TDZE 5502 / Apt Elev 5507

RNP APCH-GPS.

T A Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 6003 feet and LNAV/VNAV DA to 6223 and all visibilities ⅝ SM; increase all MDAs 260 feet and visibility LNAV Cats B/C/D and Circling Cats A/B/C ⅞ SM.

MISSED APPROACH: Climb to 8300 direct CODEN and hold.

ATIS	DENVER CENTER	FARMINGTON TOWER*	GND CON	UNICOM
127.15	118.575 348.7	118.9 (CTAF) L 257.8	121.7	122.95

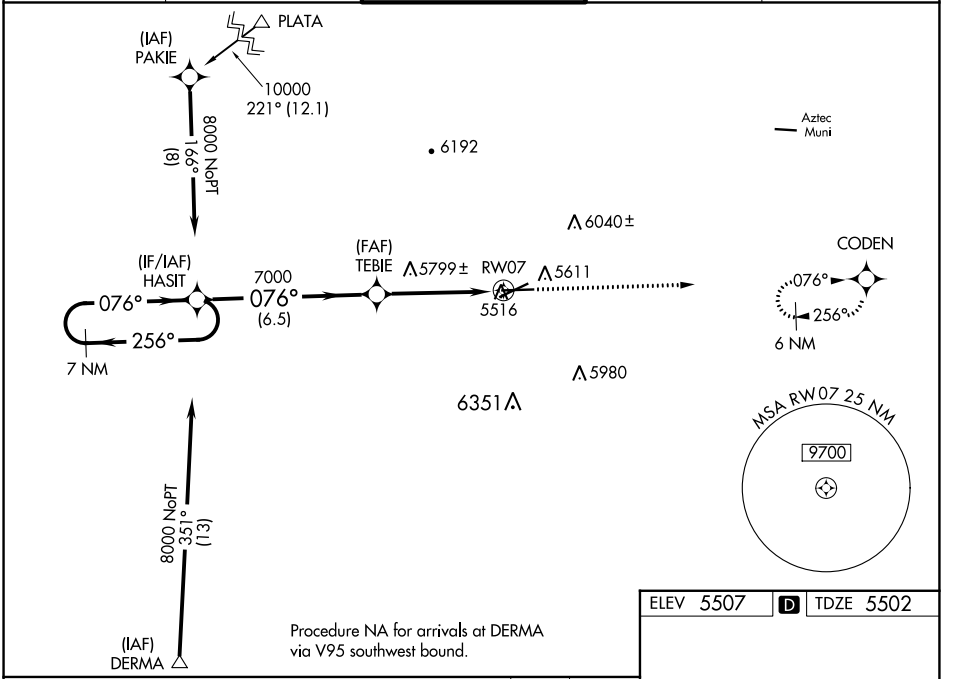

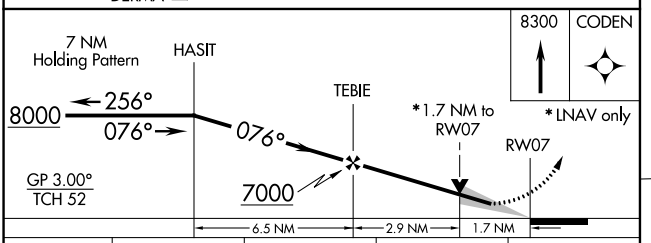

CATEGORY	A	B	C	D
LPV DA	5760-¾ 258 (300-¾)			
LNAV/VNAV DA	5980-1⅜ 478 (500-1⅜)			
LNAV MDA	6060-1 558 (600-1)		6060-1⅝ 558 (600-1⅝)	
CIRCLING	6100-1 593 (600-1)	6180-1 673 (700-1)	6380-2½ 873 (900-2½)	6460-3 953 (1000-3)



REIL Rwys 23 and 25 L
MIRL Rwys 5-23 and 7-25 L

SW-1, 26 DEC 2024 to 23 JAN 2025
SW-1, 26 DEC 2024 to 23 JAN 2025